







CAD FILE:

NO.of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
2	4.5	2.0	3.9
3	6.5	4.0	5.9
4	8.5	6.0	7.9
5	10.5	8.0	9.9
6	12.5	10.0	11.9
7	14.5	12.0	13.9
8	16.5	14.0	15.9
9	18.5	16.0	17.9
10	20.5	18.0	19.9


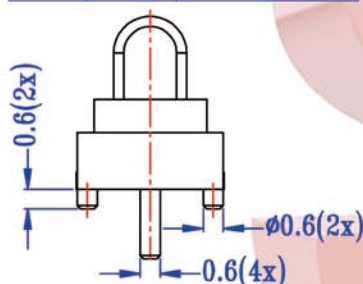


SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 12V 3A
- 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100M Ω MIN,
MEASURED BY 500V DC

2.LIFE TEST: MECHANICAL LIFE TEST 10,000 CYCLES

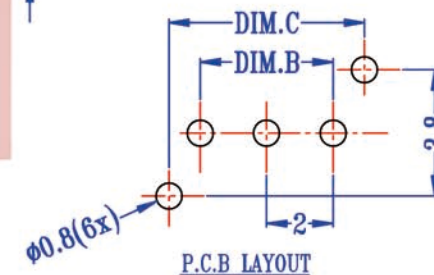

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : BLADE TYPE CONNECTOR	UNIT : mm	DRWG NO.: BL-059-20-3		
3					MODEL: BL-059-20-3	SCALE: 1:1	DWN.	Y M G	28-Aug-2021
2	CONTACT TERMINAL	C2680	3	Au PLATED			CHK'D	L M	28-Aug-2021
1	HOUSING	LCP	1	BLACK			APPD.	ENG-052	28-Aug-2021
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				