




CAD FILE:

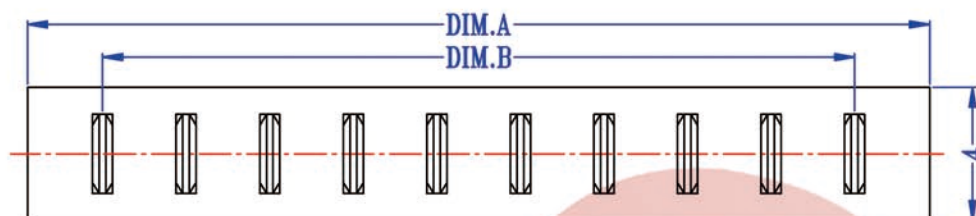


SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 12V 5A
- 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100M Ω MIN, MEASURED BY 500V DC

2.LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES

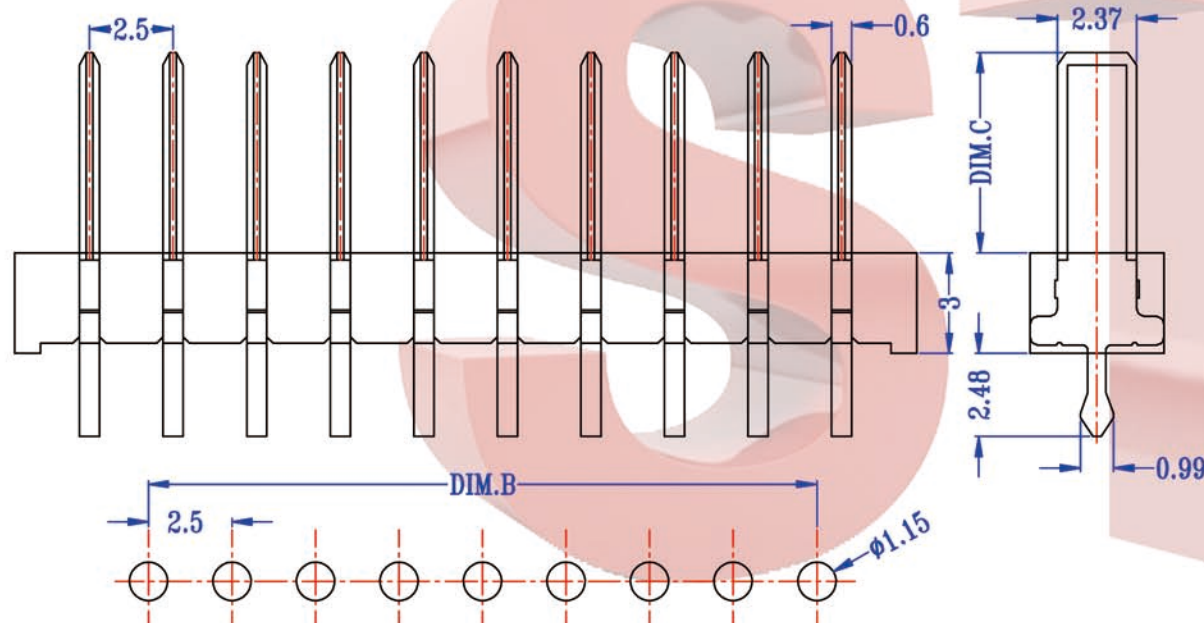

P.C.B LAYOUT

PART NO.	Dimension	
	DIM.A	DIM.B
BL-065A-25-2	7.0	2.5
BL-065A-25-3	9.5	5.0
BL-065A-25-4	12.0	7.5
BL-065A-25-5	14.5	10.0
BL-065A-25-6	17.0	12.5
BL-065A-25-7	19.5	15.0
BL-065A-25-8	22.0	17.5
BL-065A-25-9	24.5	20.0
BL-065A-25-10	27.0	22.5
BL-065A-25-11	29.5	25.0
BL-065A-25-12	32.0	27.5
BL-065A-25-13	34.5	30.0
BL-065A-25-14	37.0	32.5
BL-065A-25-15	39.5	35.0
BL-065A-25-16	42.0	37.5

DIM.C (刀片长)
4.2
5.8
6.0
7.0
8.0
8.5
9.0
9.5

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm						
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
4					TITLE : BLADE TYPE CONNECTOR			UNIT : mm	DRWG NO.: BL-065A-25-10(SERIES)		
3											
2	TERMINAL	C2680	10	Au PLATED	MODEL: BL-065A-25-10(SERIES)			SCALE: 1:1	DWN.	Y M G	28-Aug-2021
1	HOUSING	PA10T	1	BLACK					CHK'D	L M	28-Aug-2021
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED			APPD.	ENG-052	28-Aug-2021	