




CAD FILE:

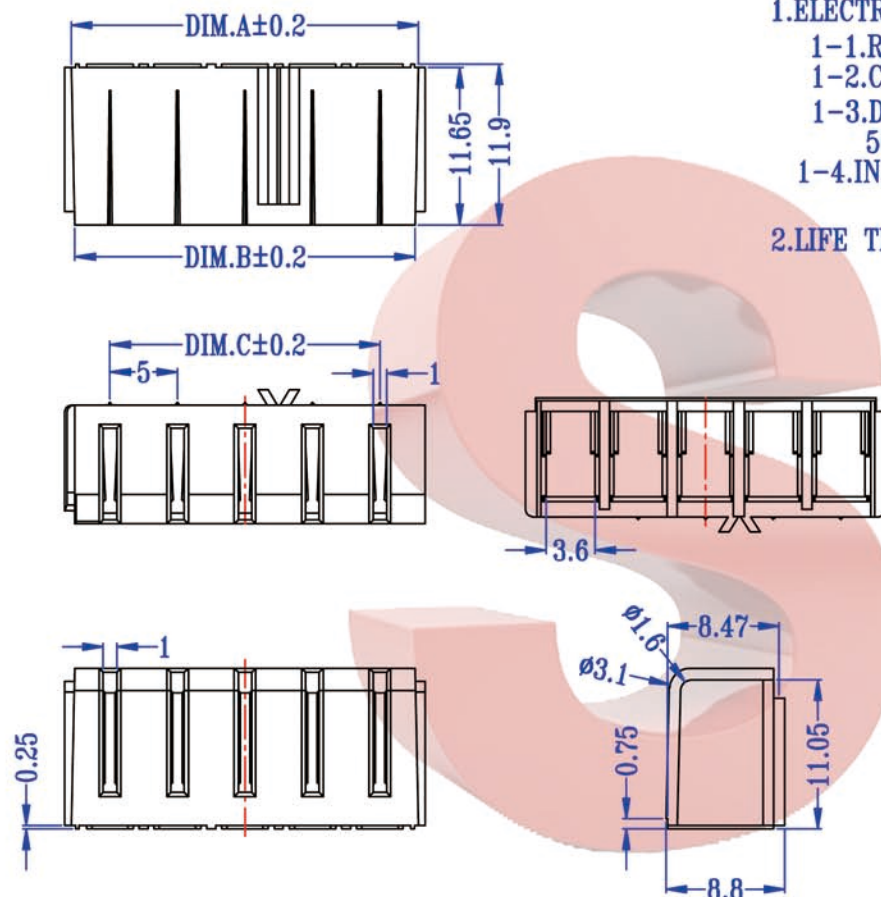


SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 20V 8A
- 1-2.CONTACT RESISTANCE: 30m Ω MAX(INITAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 1000M Ω MIN, MEASURED BY 500V DC

2.LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES

PART NO.	Dimension		
	DIM.A	DIM.B	DIM.C
BL-066B-2-2	10.7	10.2	5.0
BL-066B-2-3	15.7	15.2	10.0
BL-066B-2-4	20.7	20.2	15.0
BL-066B-2-5	25.7	25.2	20.0

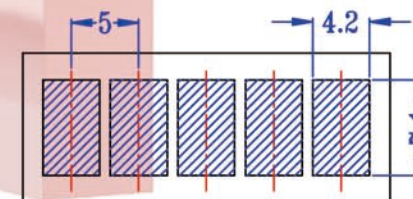

P.C.B LAYOUT

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm$ 0.1mm				
5					OVER 1.5mm : $\pm$ 0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : BLADE TYPE CONNECTOR		UNIT : mm	DRWG NO.: BL-066B-2-5(SERIES)	
3					MODEL: BL-066B-2-5(SERIES)		SCALE: 1:1	DWN. Y M G	12-Dec-2022
2	TERMINAL	C5210	5	Au PLATED	S.T. INDUSTRIAL (ASIA) LIMITED		APPD.	CHK'D L M	12-Dec-2022
1	HOUSING	PA10T	1	BLACK				ENG-052	12-Dec-2022
NO.	PARTS	MATERIALS	Q'TY	FINISH					