




1.ELECTRICAL CHARACTERISTICS:

- ## 2.LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES

PART NO.	Dimension		
	DIM.A	DIM.B	DIM.C
BL-067A-25-3	11.7	9.3	9.0
BL-067A-25-4	13.7	11.3	11.0
BL-067A-25-5	15.7	13.3	13.0
BL-067A-25-6	17.7	15.3	15.0
BL-067A-25-7	19.7	17.3	17.0
BL-067A-25-8	21.7	19.3	19.0
BL-067A-25-9	23.7	21.3	21.0
BL-067A-25-10	25.7	23.3	23.0
BL-067A-25-11	27.7	25.3	25.0
BL-067A-25-12	29.7	27.3	27.0
BL-067A-25-13	31.7	29.3	29.0
BL-067A-25-14	33.7	31.3	31.0
BL-067A-25-15	35.7	33.3	33.0
BL-067A-25-16	37.7	35.3	35.0

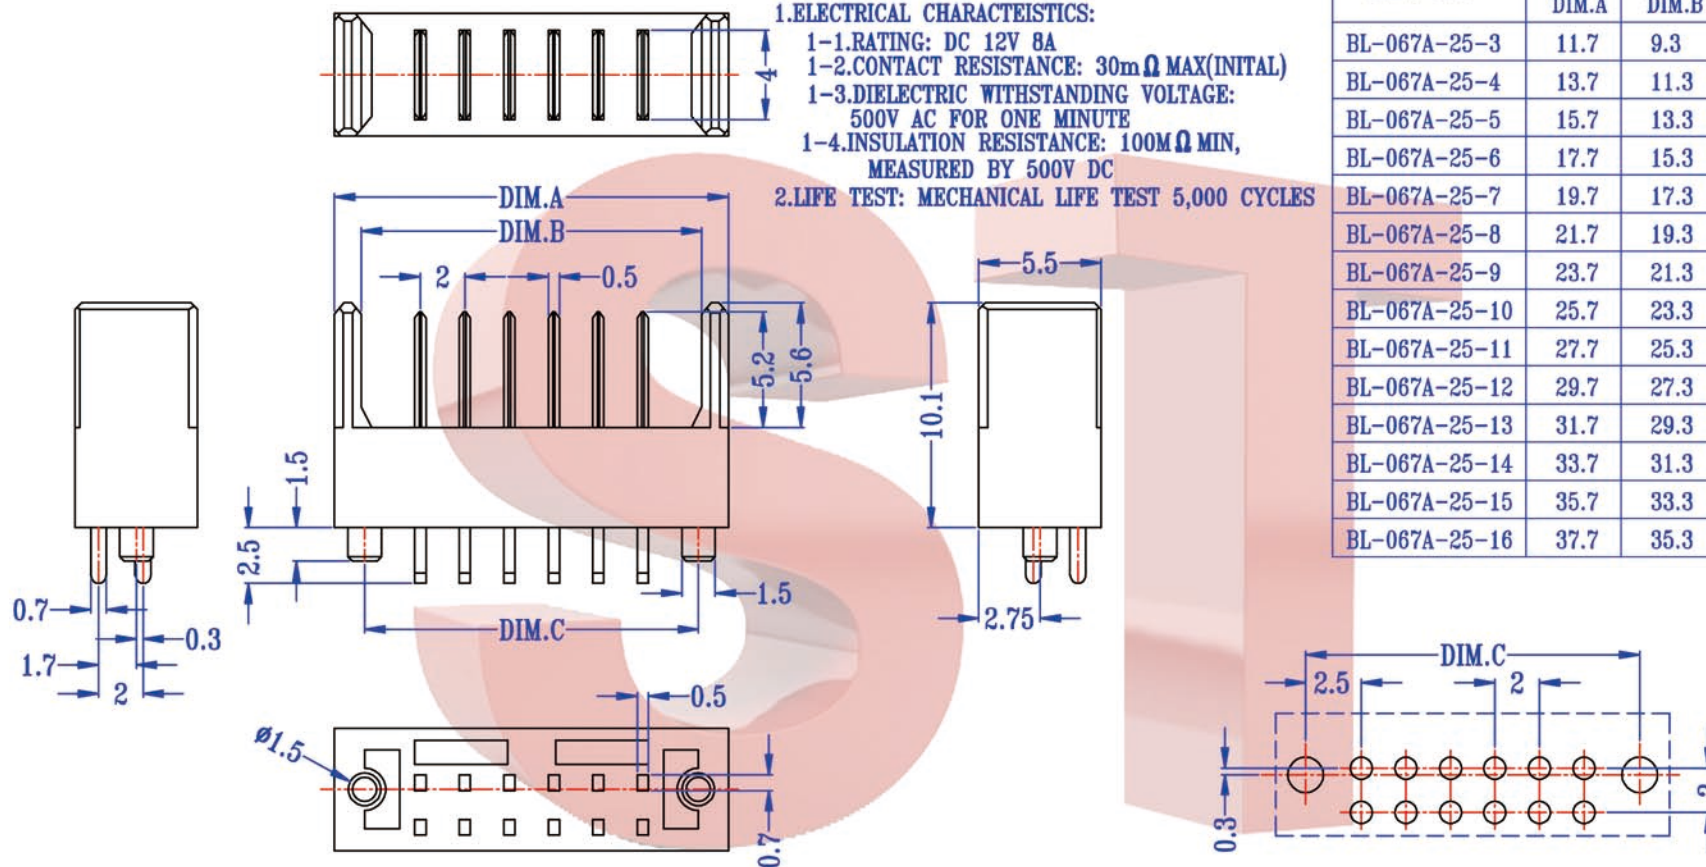

P.C.B LAYOUT

8					TOLERANCE UNLESS SPECIFIED							
7												
6					WITHIN 1.5mm : ±0.1mm							
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION				APPD.
4					TITLE : BLADE TYPE CONNECTOR			UNIT : mm	DRWG NO.: BL-067A-25-6(SERIES)			
3					MODEL: BL-067A-25-6(SERIES)			SCALE: 1:1	DWN.	Y M G	11-Dec-2022	
2	TERMINAL	C2680	6	AU PLATED	S.T. INDUSTRIAL (ASIA) LIMITED				CHK'D	L M	11-Dec-2022	
1	HOUSING	LCP	1	GRAY					APPD.	ENG-052	11-Dec-2022	
NO.	PARTS	MATERIALS	Q'TY	FINISH								