CAD FILE:

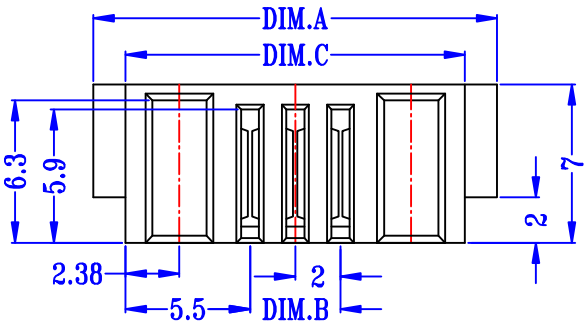

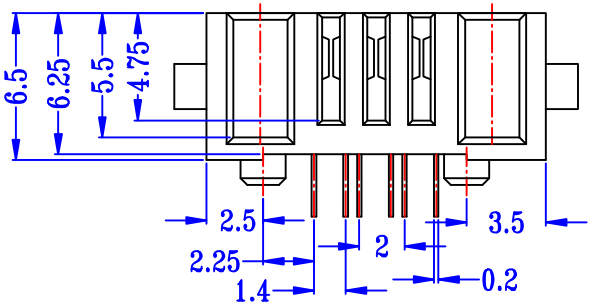

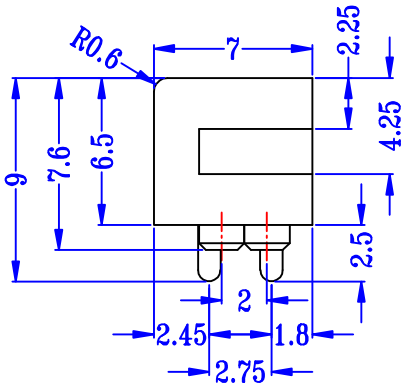

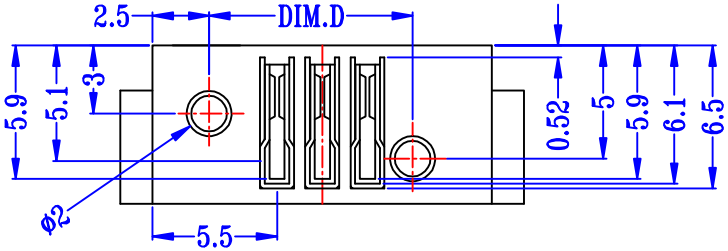

P.C.B LAYOUT

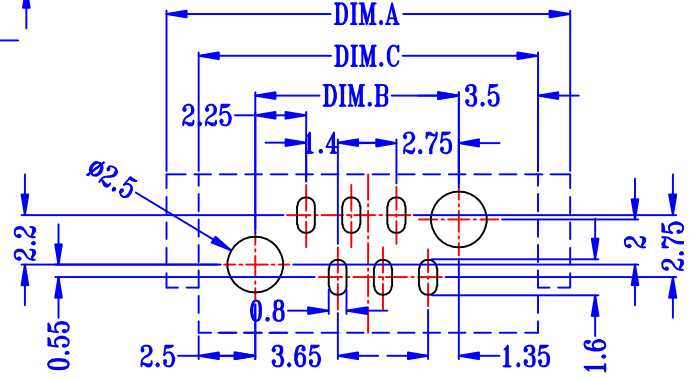

SPECIFICATIONS

1.ELECTRICAL CHARACTEISTICS:
- 1-1.RATING: DC 12V 8A
- 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100M MIN, MEASURED BY 500V DC

2.LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES

PART NO.	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
BL-067B-25-3	17.85	4.0	15.0	9.0
BL-067B-25-4	19.85	6.0	17.0	11.0
BL-067B-25-5	21.85	8.0	19.0	13.0
BL-067B-25-6	23.85	10.0	21.0	15.0
BL-067B-25-7	25.85	12.0	23.0	17.0
BL-067B-25-8	27.85	14.0	25.0	19.0
BL-067B-25-9	29.85	16.0	27.0	21.0
BL-067B-25-10	31.85	18.0	29.0	23.0
BL-067B-25-11	33.85	20.0	31.0	25.0
BL-067B-25-12	35.85	22.0	33.0	27.0
BL-067B-25-13	37.85	24.0	35.0	29.0
BL-067B-25-14	39.85	26.0	37.0	31.0
BL-067B-25-15	41.85	28.0	39.0	33.0
BL-067B-25-16	43.85	30.0	41.0	35.0

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7				
6				
5				
4				
3				
2	TERMINAL	C5210	6	Au PLATED
1	HOUSING	PA10T	1	BLACK

TOLERANCE UNLESS SPECIFIED
WITHIN 1.5mm : ±0.1mm
OVER 1.5mm : ±0.2mm

ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.

TITLE : BLADE TYPE CONNECTOR
UNIT : mm
DRWG NO.: BL-067B-25-6(SERIES)
MODEL: BL-067B-25-6(SERIES)
SCALE: 1:1

DWN.	Y M G	28-Dec-2024
CHK'D	L M	28-Dec-2024
APPD.	ENG-052	28-Dec-2024

S.T. INDUSTRIAL (ASIA) LIMITED