

S.T. Industrial (ASIA) Limited

Room A2 10/F., Hung Mou Industrial Bldg.,
62 Hung To Road., Kwun Tong, Kowloon Hong Kong.
Homepage: <http://www.st-switch-jack.com>
Tel: 3590 5120 Fax: 3590 8994

Products Catalogue



Blade Type Connector



BL-059-20-3

Specification


Rating : DC 12V 3A
Contact Resistance : 30mΩ max.
Insulation Resistance : 100MΩ (500V DC)
Withstand Voltage : AC 500V for 1min.
Operating life : Measchical life test 10,000 cycles

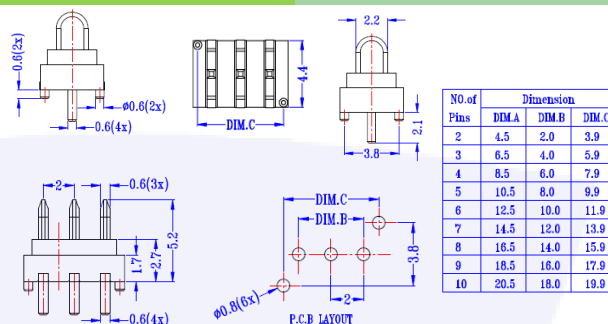

BL-065A-25-10

Specification


Rating : DC 12V 5A
Contact Resistance : 30mΩ max.
Insulation Resistance : 100MΩ (500V DC)
Withstand Voltage : AC 500V for 1min.
Operating life : Measchical life test 5,000 cycles

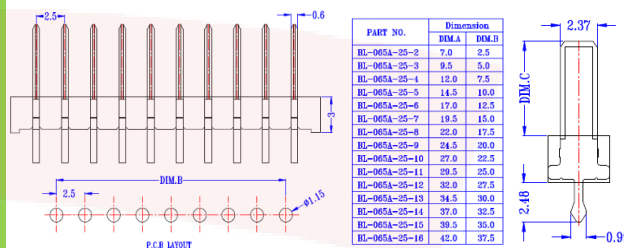

BL-066B-2-5

Specification


Rating : DC 20V 8A
Contact Resistance : 30mΩ max.
Insulation Resistance : 100MΩ (500V DC)
Withstand Voltage : AC 500V for 1min.
Operating life : Measchical life test 5,000 cycles

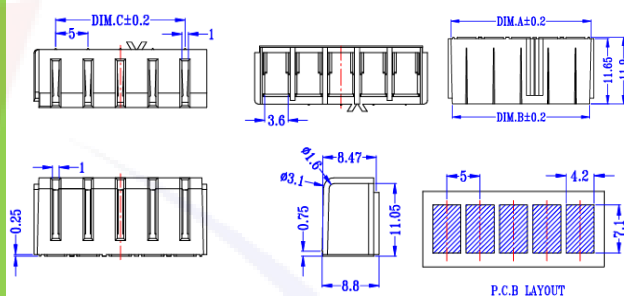

BL-066A-2-5

Specification

Rating : DC 16V 7A
Contact Resistance : 30mΩ max.
Insulation Resistance : 100MΩ (500V DC)
Withstand Voltage : AC 500V for 1min.
Operating life : Measchical life test 5,000 cycles

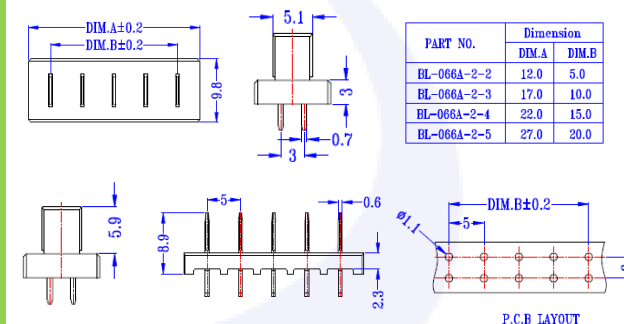

BL-067B-25-6

Specification

Rating : DC 12V 8A
Contact Resistance : 30mΩ max.
Insulation Resistance : 100MΩ (500V DC)
Withstand Voltage : AC 500V for 1min.
Operating life : Measchical life test 5,000 cycles

