

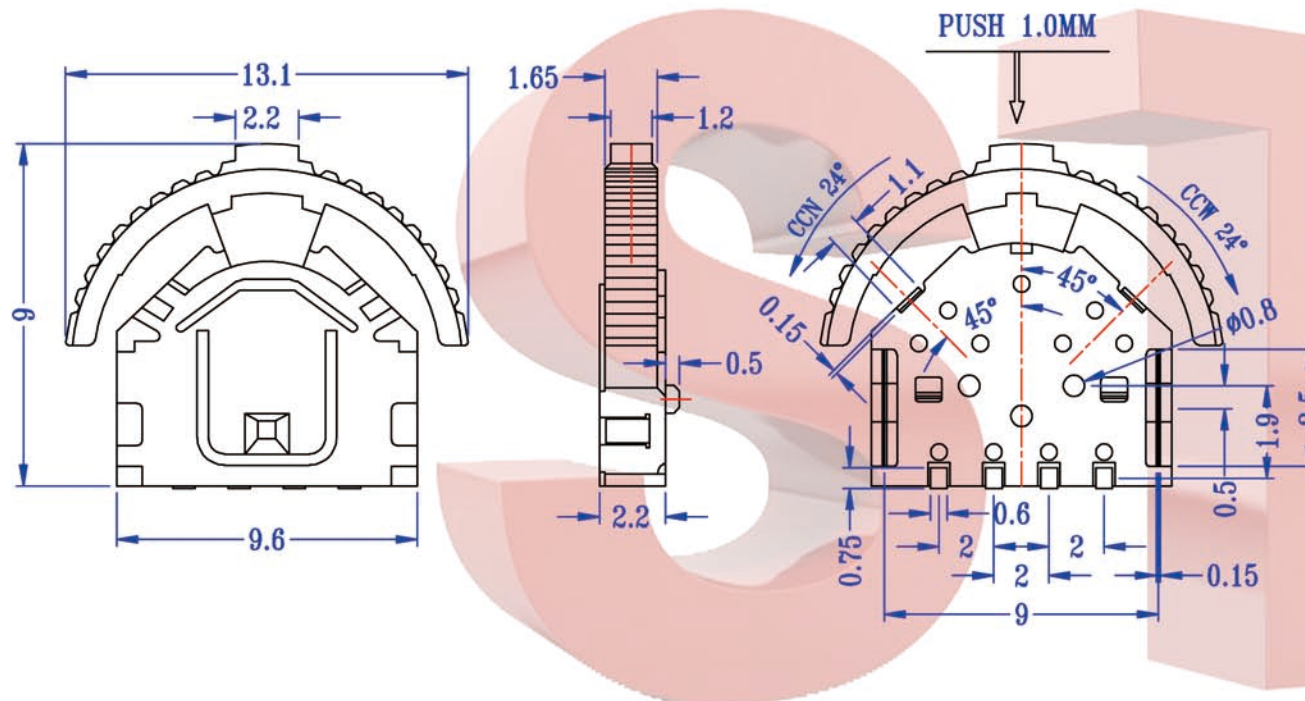


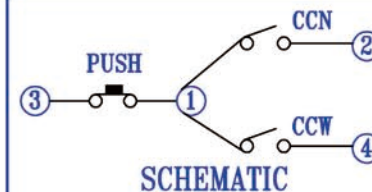

1.ELECTRICAL CHARACTERISTICS:
 1-1.RATING: DC 12V 0.1A
 1-2.CONTACT RESISTANCE: 100m Ω MAX(INITIAL)
 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
 100V AC FOR ONE MINUTE
 1-4.INSULATION RESISTANCE: 100M Ω MIN,
 MEASURED BY 500V DC
 2.MECHANICAL CHARACTERISTICS:
 2-1.OPERATING FORCE: TOGGLE:80 $\pm$ 50gf
 DOWNWAR: 205 $\pm$ 50gf
 3.LIFE TEST: 30000 CYCLES MIN
 4.TRAVEL: PUSH: 0.8 $\pm$ 0.2mm; CCN24° ; CCW24°
 5.PACKING: TAPE&REEL(1000PCS/REEL)

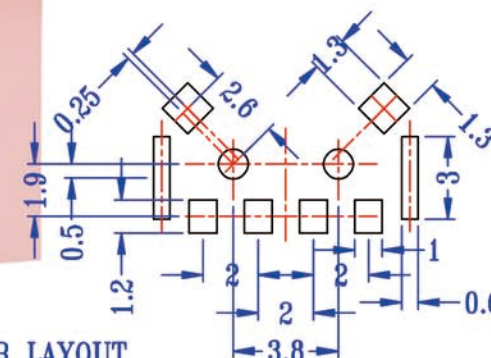

P.C.B LAYOUT

[illegible]