

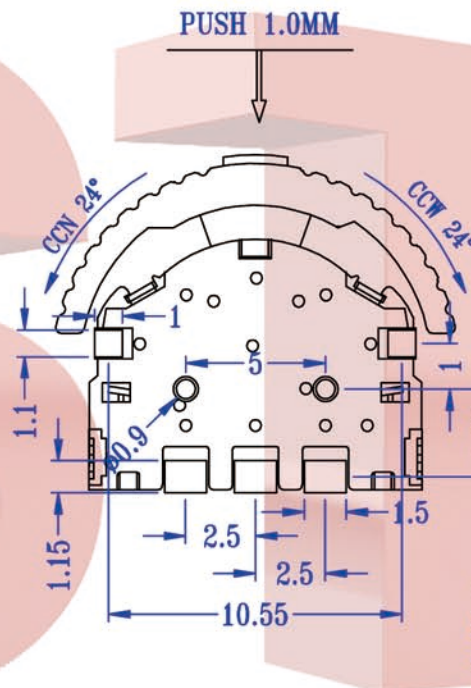
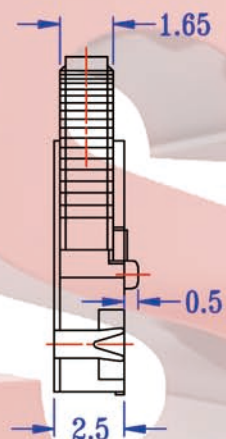
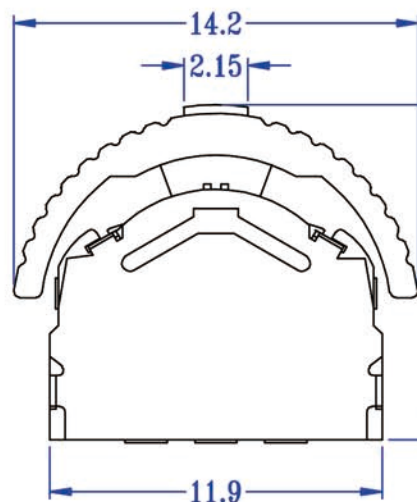


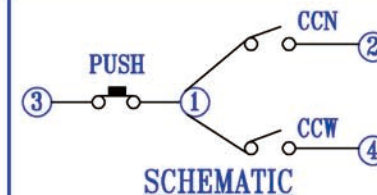

SPECIFICATIONS

- 1.ELECTRICAL CHARACTERISTICS:
 1-1.RATING: DC 12V 0.1A
 1-2.CONTACT RESISTANCE: 100m Ω MAX(INITIAL)
 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
 100V AC FOR ONE MINUTE
 1-4.INSULATION RESISTANCE: 100M Ω MIN,
 MEASURED BY 500V DC
 2.MECHANICAL CHARACTERISTICS:
 2-1.OPERATING FORCE: TOGGLE:80 $\pm$ 50gf
 DOWNWAR: 205 $\pm$ 50gf
 3.LIFE TEST: 100000 CYCLES MIN
 4.TRAVEL: PUSH: 1 $\pm$ 0.2mm; CCN24° ; CCW24°
 5.PACKING: TAPE&REEL(1000PCS/REEL)

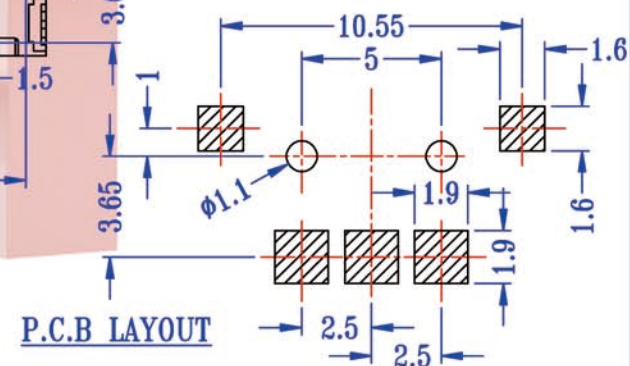

8				TOLERANCE UNLESS SPECIFIED				
7								
6	KNOB	NYLON	1	BLACK	WITHIN: 1.5±0.1mm OVER : 1.5±0.2mm			
5	SPRING	SUS	1	NATURAL	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	COVER	SUS	1	NATURAL	TITLE : WHEEL SWITCH		UNIT : MM	DRWG NO.: MT-027
3	DOME	C5191	1	Ag CLAD	MODEL: MT-027		SCALE: 4 : 1	DWN. CHK'D APPD.
2	TERMINAL	C5210	1	Ag PLATED			YMG L M ENG-052	12-May-2023 12-May-2023 12-May-2023
1	CASE	NYLON	1	BLACK	S.T. INDUSTRIAL (ASIA) LIMITED			
NO.	PART NAME	MATERIAL	Q'TY	FINISHING				