


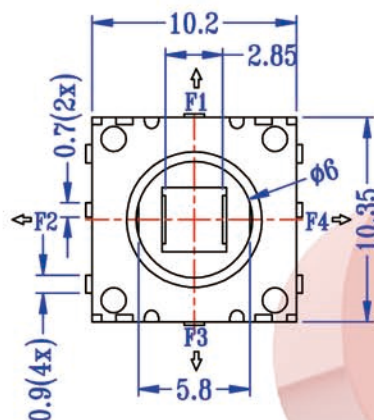


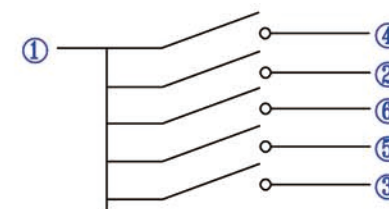

CAD FILE:

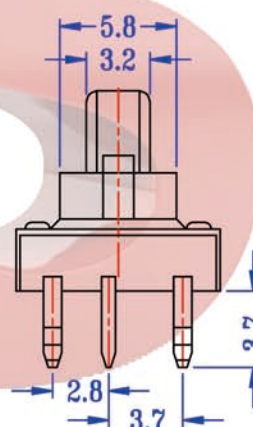


	1	2	3	4	5	6
F1	○			○		
F2	○	○				
F3	○					○
F4	○			○		
F5	○		○			

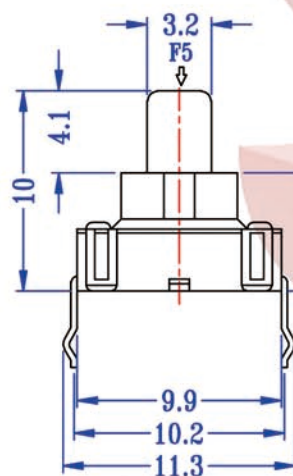

SCHEMATIC

SPECIFICATIONS

- 1.ELECTRICAL CHARACTERISTICS:
 1-1.RATING: DC 12V 0.1A
 1-2.CONTACT RESISTANCE: 100mΩ MAX(INITIAL)
 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
 250V AC FOR ONE MINUTE
 1-4.INSULATION RESISTANCE: 100MΩ MIN,
 MEASURED BY 500V DC
 2.TRAVEL: 0.2±0.1mm
 3.MECHANICAL CHARACTERISTICS:
 3-1.OPERATING FORCE:MIDDLE: 250±50gf
 EDGE: 150±50gf
 4.LIFE TEST: 50000 CYCLES MIN
 5.PACKING: BOX (400PCS/BOX)

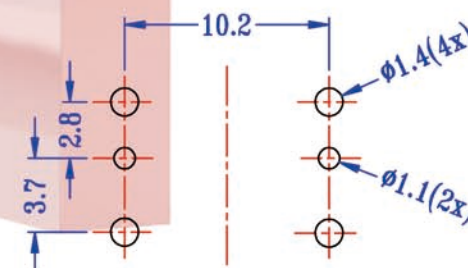

P.C.B LAYOUT

8					TOLERANCE				
7	SHIM	C5191	1	Ag CLAD	UNLESS SPECIFIED				
6	PLUM SHAPED BUTTON	PA46	1	BLACK	WITHIN 1.5mm : ±0.1mm				
5	KNOB	PA46	1	BLACK	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	COVER	SUS304	1	NATURAL	TITLE : Multi Function Switches		UNIT : mm	DRWG NO.: MT-5160 (021)	
3	DOME	SUS301	5	Ag CLAD	MODEL: MT-5160		SCALE: 1:1	DWN. Y M G	27-Feb-2022
2	TERMINAL	C5191	6	Ag PLATED	S.T. INDUSTRIAL (ASIA) LIMITED			CHK'D L M	27-Feb-2022
1	BASSE	PA46	1	BLACK				APPD. ENG-052	27-Feb-2022
NO.	PARTS	MATERIALS	Q'TY	FINISH					