


SCHEMATIC

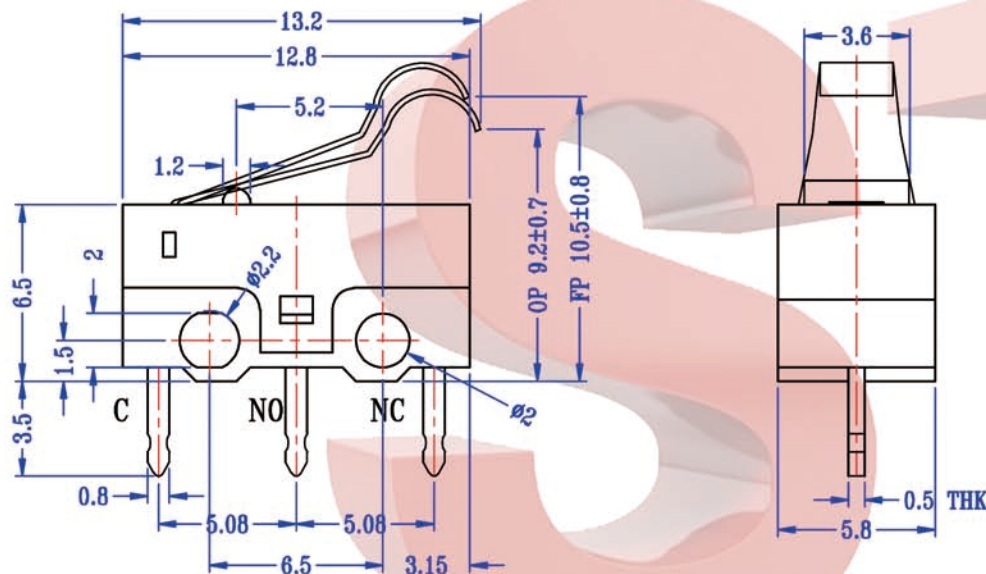

SPECIFICATIONS

1.ELECTRICAL CHARACTEISTICS:

- 1-1.RATING: AC 125V 3A
- 1-2.CONTACT RESISTANCE: 30m Ω MAX(INITAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
250V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100M Ω MIN,
MEASURED BY 500V DC
- 1-5.BOUNCE: 10sec MAX
- 2.MECHANICAL PERFORMANCE
- 2.1 OPERATING FORCE: 35 $\pm$ 15gf
3. LIFE TEST
- 3.1.3-1.ELECTRONICS LIFE TEST 50000 CYCLES.



P.C.B LAYOUT

8					TOLERANCE UNLESS SPECIFIED						
7											
6	CONTACT	COPPER WIRE	1	Ag PLATED		WITHIN 1.5mm : ±0.1mm					
5	SPRING PLATE	PBS C5210R-H	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED	TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.: MX-1383		
3	CASE	NYLON	1	WHITE							
2	HOUSING	PC	1	BLACK	MODEL: MX-1383			SCALE: 4:1	DWN.	Y M G	4-Apr-2018
1	KNOB	POM	1	RED					CHK'D	L M	4-Apr-2018
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED			APPD.	ENG-052	4-Apr-2018	