



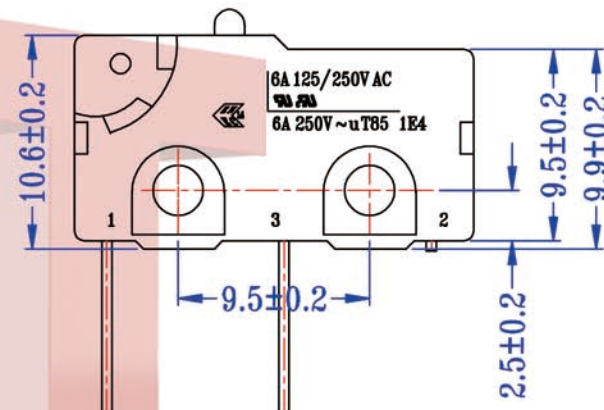

CAD FILE:

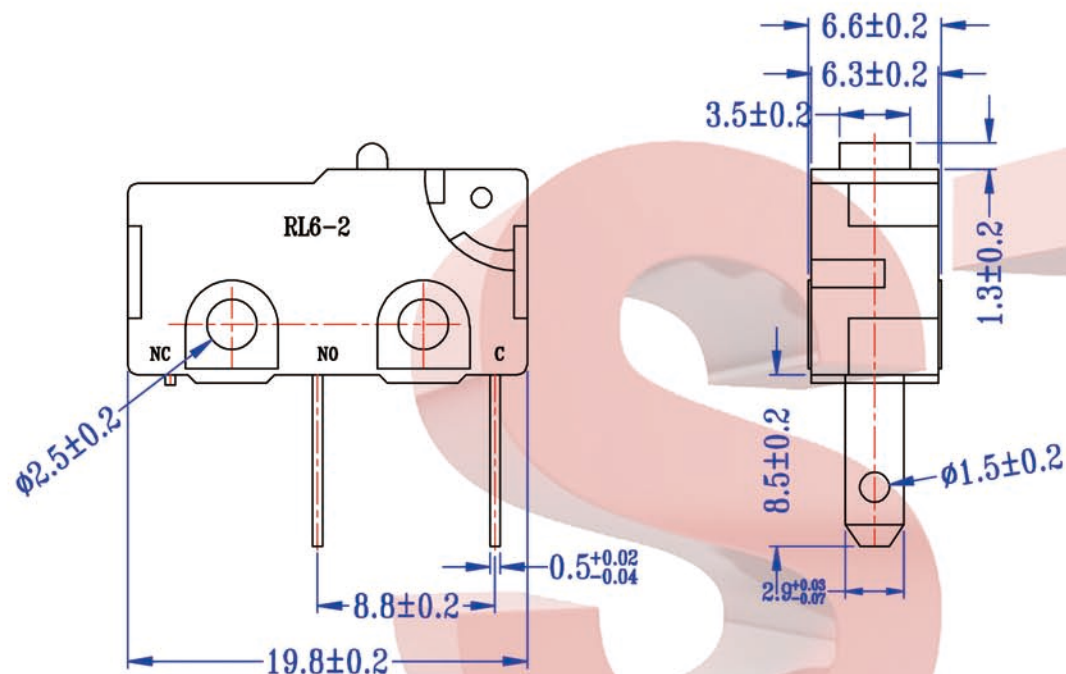

SPECIFICATION

1. RATING : UL C-UL : 6A 125/250VAC
ENEC : 6A 250VAC T85 1E4
2. CIRCUIT : (ON)-OFF SPST 2P
3. CONTACT RESISTANCE : 30m OHMS Max
4. INSULATION RESISTANCE : DC 500V 100M OHMS Min
5. WITHSTAND VOLTAGE : AC 1500V 1 Minute
6. ELECTRICAL LIFE : 10000 Cycles at Full Load
7. OPERATION FORCE : 60±15gf
8. OPERATION TEMPERATURE RANGE : -25~+125°C

8					TOLERANCE				
7					UNLESS SPECIFIED				
6	SPRING	STEEL WIRE	1	NATURAL	WITHIN 1.5mm : ±0.1mm				
5	CONTACT	PBS STRIP	1	Cu PLATED	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	TERMINAL	COPPER ALLOY	2	Ag PLATED	TITLE : MICRO SWITCH				
3	COVER	PBT UL 94V0	1	BLACK	UNIT : mm				
2	HOUSING	PBT UL 94V0	1	BLACK	MODEL: MX-62-C-00				
1	KNOB	POM	1	BLACK	SCALE: 1:1				
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				
					DRWG NO.: MX-62-C-00				
					DWN. Y M G				
					CHK'D L M				
					APPD. ENG-8051				
					28-Oct-2021				