



CAD FILE:

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:


1-1.RATING: DC 12V 2A

1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2.TRAVEL: 0.8mm OPERATING FORCE : 90±20gf

3.LIFE TEST: 10,000 CYCLES MIN

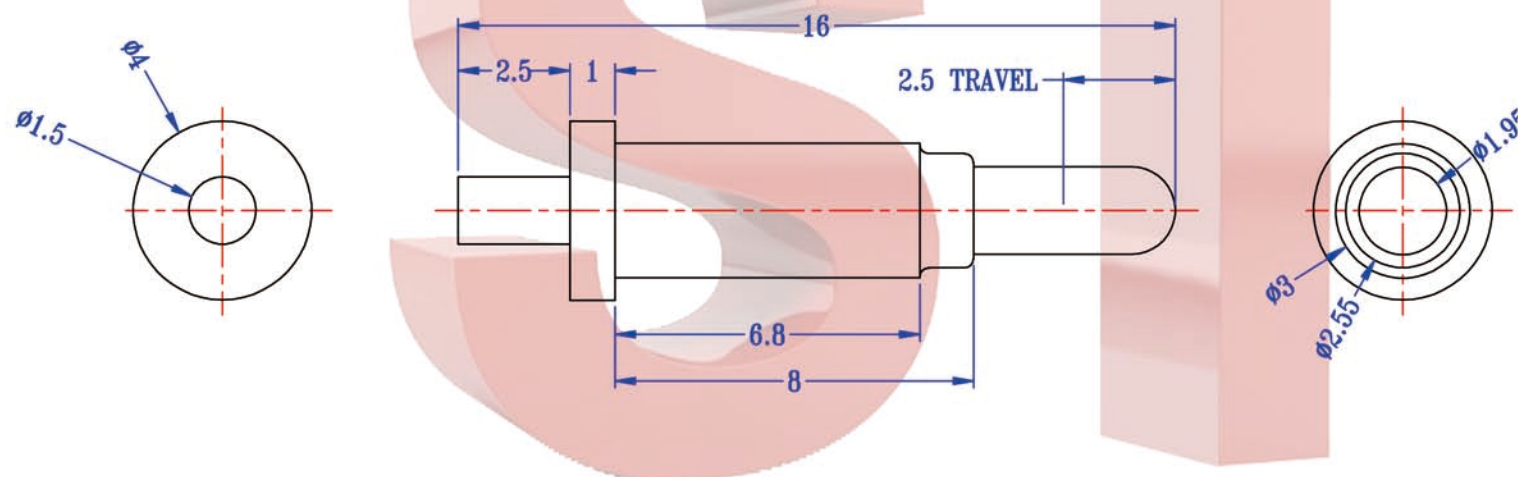

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : Pogo Pin Connector	UNIT : mm	DRWG NO.: PG-082-M16		
3	SPRING	SUS	1	NATURAL	MODEL: PG-082-M16	SCALE: 1:1	DWN. Y M G	28-Aug-2022	
2	PLUNGER	C3604	1	Au PLATED			CHK'D L M	28-Aug-2022	
1	PIN	C3604	1	Au PLATED			APPD. ENG-052	28-Aug-2022	
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				