



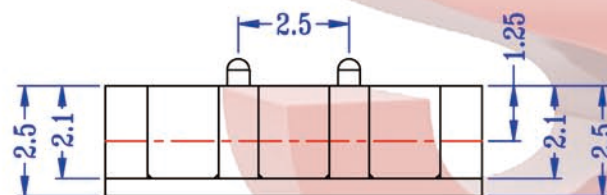

CAD FILE:

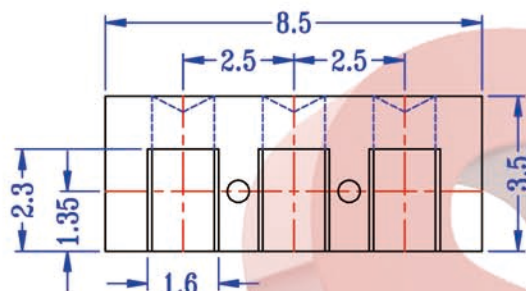

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A


1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2.LIFE TEST: MECHANICAL LIFE TEST 10,000 CYCLES.



8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : Pogo Pin Connector	UNIT : mm	DRWG NO.: PG-D081-25-3P		
3					MODEL: PG-D081-25-3P	SCALE: 1:1	DWN. Y M G	28-Aug-2022	
2	PIN	C3604	1	Au PLATED			CHK'D L M	28-Aug-2022	
1	HOUSING	PA46	1	BLACK			APPD. ENG-052	28-Aug-2022	
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				