




CAD FILE:

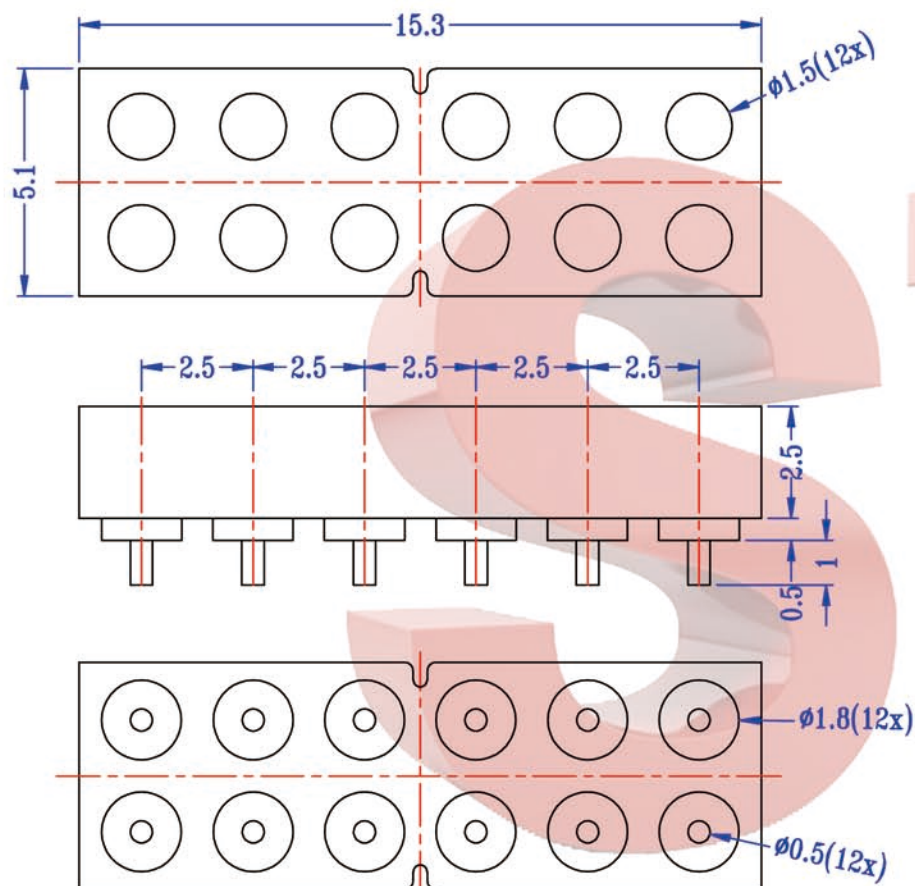


SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A

1-2.CONTACT RESISTANCE: 30m Ω MAX(INITAL)1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE1-4.INSULATION RESISTANCE: 100M Ω MIN,
MEASURED BY 500V DC

2.LIFE TEST: 10,000 CYCLES.



8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm				
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : Pogo Pin Connector		UNIT : mm	DRWG NO.: PG-D082-25-12P	
3					MODEL: PG-D082-25-12P		SCALE: 1:1	DWN. Y M G	28-Aug-2022
2	PIN	C3604	12	Au PLATED				CHK'D L M	28-Aug-2022
1	HOUSING	PA46	1	BLACK				APPD. ENG-052	28-Aug-2022
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				