




CAD FILE:

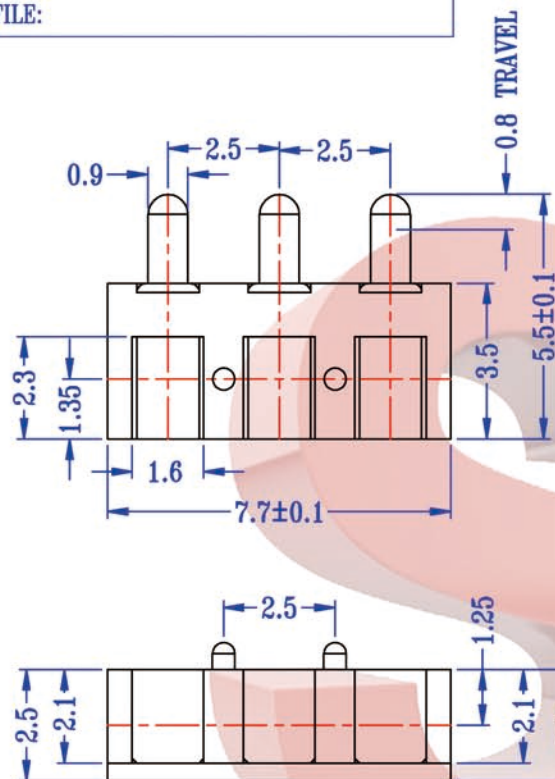

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A


1-2.CONTACT RESISTANCE: $30m\Omega$ MAX(INITAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: $100M\Omega$ MIN,
MEASURED BY 500V DC2.TRAVEL: 0.8mm OPERATING FORCE : $90 \pm 20gf$

3.LIFE TEST: 10,000 CYCLES MIN



8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1mm$				
5					OVER 1.5mm : $\pm 0.2mm$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	SPRING	SUS304	3	NATURAL	TITLE : Pogo Pin Connector			UNIT : mm	DRWG NO.: PG-U081-25-3P
3	PLUNGER	C3604	3	Au PLATED	MODEL: PG-U081-25-3P			SCALE: 1:1	DWN. Y M G 28-Aug-2022
2	PIN	C3604	3	Au PLATED	S.T. INDUSTRIAL (ASIA) LIMITED			CHK'D L M	28-Aug-2022
1	HOUSING	PA46	1	BLACK				APPD. ENG-052	28-Aug-2022
NO.	PARTS	MATERIALS	Q'TY	FINISH					