

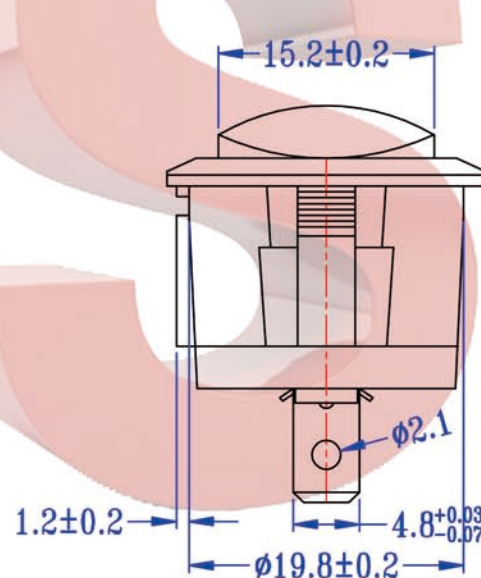


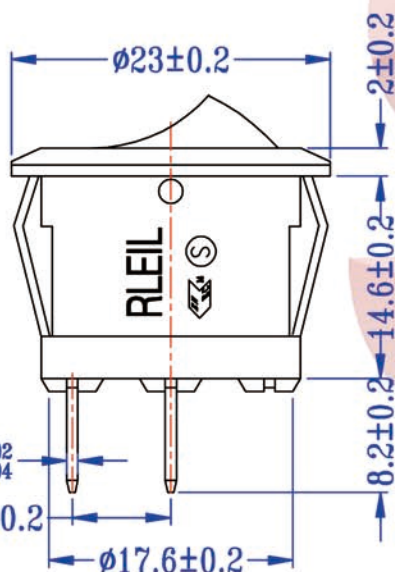

Panel thickness	X
0.75~1.25	20.2
1.25~2.0	20.4
2.0~3.0	20.6

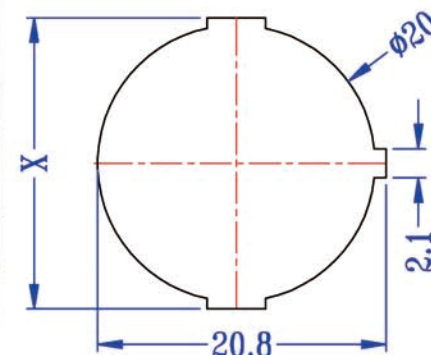

PANEL HOLE SIZE

1. RATING: 10A 125VAC UL C-UL
6(2)A 250VAC T125/55 1E4
ENEC SEMKO ;
2. CIRCUIT : ON-OFF DPST 2P
3. CONTACT RESISTANCE : 30m OHMS Max
4. INSULATION RESISTANCE : DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE : AC 1500V 1 Minute
6. ELECTRICAL LIFE : 10000 Cycles at Full Load
7. OPERATION PORCE : 300~600gf
8. OPERATION TEMPERATURE RANGE : -25~+125° C

8				TOLERANCE				
7				UNLESS SPECIFIED				
6				WITHIN 1.5mm : ±0.1mm				
5				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACTOR	AgSnO ₂ In ₂ O ₃ (10)/Cu			TITLE : ROCKER SWITCH		UNIT : mm	DRWG NO.: RS-1132
3	TERMINAL	COPPER ALLOY	2	Ag PLATED	MODEL: RS-1132		SCALE: 2:1	DWN. Y M G 24-Mar-202
2	ROCKER	PC UL 94HB	1	BLACK			CHK'D L M	24-Mar-202
1	HOUSING	NYLON #66 UL 94V-2	1	BLACK	S.T. INDUSTRIAL (ASIA) LIMITED		APPD. ENG-8051	24-Mar-202
NO.	PARTS	MATERIALS	Q'TY	FINISH				