





CAD FILE:




MATERIALS

1. HOUSING : NYLON #66 UL 94V-2
2. ROCKER : PC UL94HB
3. TERMINAL : Copper Alloy Ag plated
4. CONTACTOR : Ag SnO₂In₂O₃ (10)/Cu

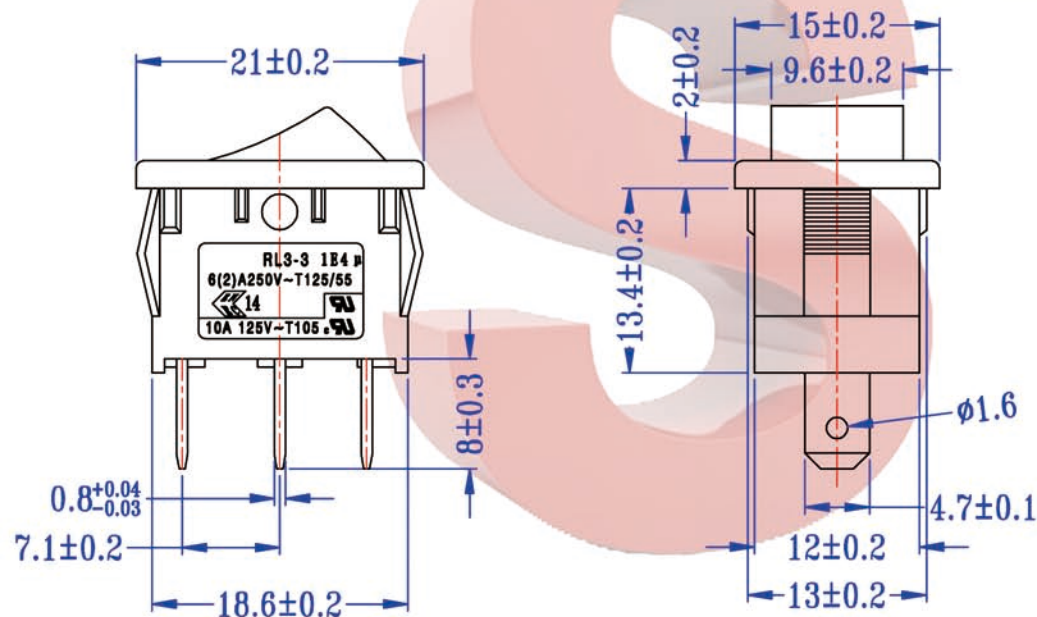


SPECIFICATION

1. RATING: UL C-UL : 10A 125VAC T105
ENEC:
6(2)A 250VAC T125/55 1E4
2. NEON LAMP: 220VAC
3. CIRCUIT : ON-OFF W/LAMP SPDT 3P
4. CONTACT RESISTANCE : 30m OHMS Max
5. INSULATION RESISTANCE : DC500V 100M OHMS Min
6. WITHSTAND VOLTAGE : AC 1500V 1 Minute
7. ELECTRICAL LIFE : 10000 Cycles at Full Load
8. OPERATION FORCE : 400~800gf
9. OPERATION TEMPERATURE RANGE : $-25 \sim +125^{\circ}\text{C}$



CIRCUIT DIAGRAM

Panel thickness	X
0.75~1.25	19.2
1.25~2.0	19.4
2.0~3.0	19.6



PANEL HOLE SIZE

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$				
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : ROCKER SWITCH	UNIT : mm	DRWG NO.: RS-1134		
3					MODEL: RS-1134	SCALE: 2:1	DWN. Y M G	11-Mar-2021	
2							CHK'D L M	11-Mar-2021	
1							APPD. ENG-8051	11-Mar-2021	
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				