





CAD FILE:





Panel thickness	X
0.75~1.25	19.2
1.25~2.00	19.4
2.00~3.00	19.6

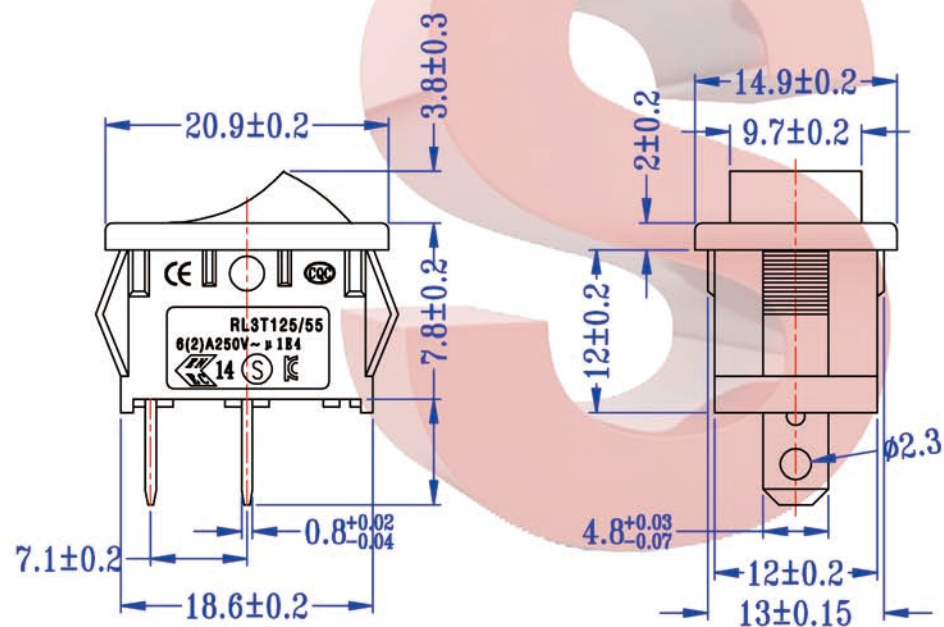

SPECIFICATION

- 1.RATING:UL C-UL : 10A 125VAC
ENEC SEMKO ;
6(2)A 250VAC T125/55 1E4
- 2.CIRCUIT : ON-OFF SPST 2P
- 3.CONTACT RESISTANCE : 30m OHMS Max
- 4.INSULATION RESISTANCE : DC500V 100M OHMS Min
- 5.WITHSTAND VOLTAGE : AC 1500V 1 Minute
- 6.ELECTRICAL LIFE : 10000 Cycles at Full Load
- 7.OPERATION PORCE : 300~800gf
- 8.OPERATION TEMPERATURE RANGE : -25~+125° C

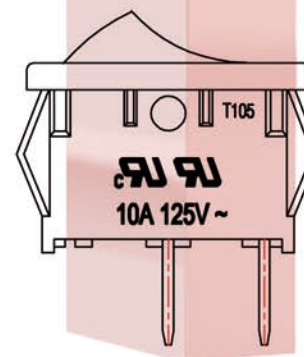

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$				
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE :	UNIT : mm	DRWG NO.: RS-1136		
3					MODEL: RS-1136	SCALE: 2:1	DWN.	Y M G	24-Mar-2020
2							CHK'D	L M	24-Mar-2020
1							APPD.	ENG-8051	24-Mar-2020
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				