

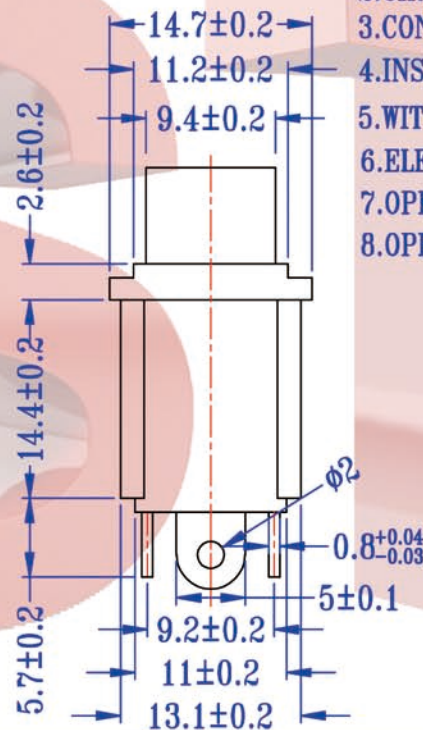


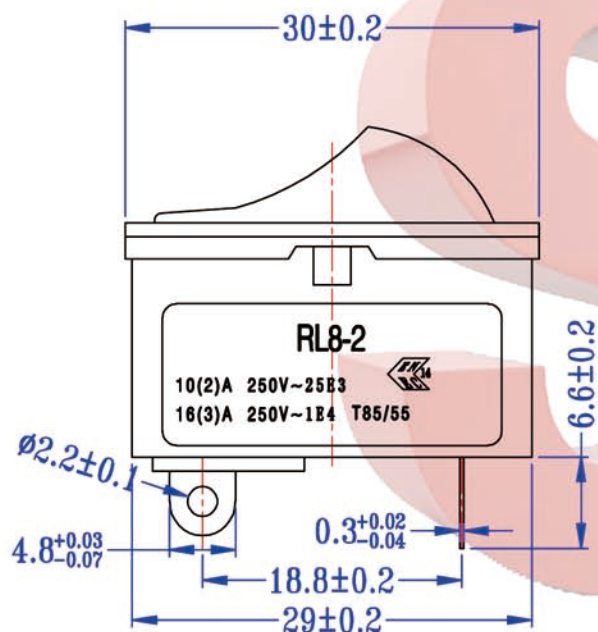

CAD FILE:

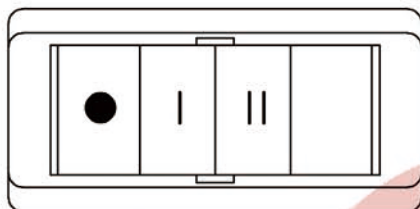

SPECIFICATION

1. RATING: UL C-UL: 8A 125VAC 1E4 T85
ENEC SEMKO:
10(2)A 250VAC 25E3
16(3)A 250VAC 1E4 T85/55
2. CIRCUIT : ON-OFF DPST 3P
3. CONTACT RESISTANCE : 30m OHMS Max
4. INSULATION RESISTANCE : DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE : AC 1500V 1 Minute
6. ELECTRICAL LIFE : 10000 Cycles at Full Load
7. OPERATION FORCE : 400~800gf
8. OPERATION TEMPERATURE RANGE : $-25 \sim +125^{\circ}\text{C}$

MATERIALS

1. HOUSING : NYLON #66
2. ROCKER : NYLON #66
3. TERMINAL : COPPER ALLOY Ag PLATED
4. CONTACTOR : $\text{AgSnO}_2\text{In}_2\text{O}_3(10)/\text{Cu}$

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$				
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE :	UNIT : mm	DRWG NO.: RS-1137		
3					MODEL: RS-1137	SCALE: 2:1	DWN.	Y M G	24-Mar-2020
2							CHK'D	L M	24-Mar-2020
1							APPD.	ENG-8051	24-Mar-2020
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				