

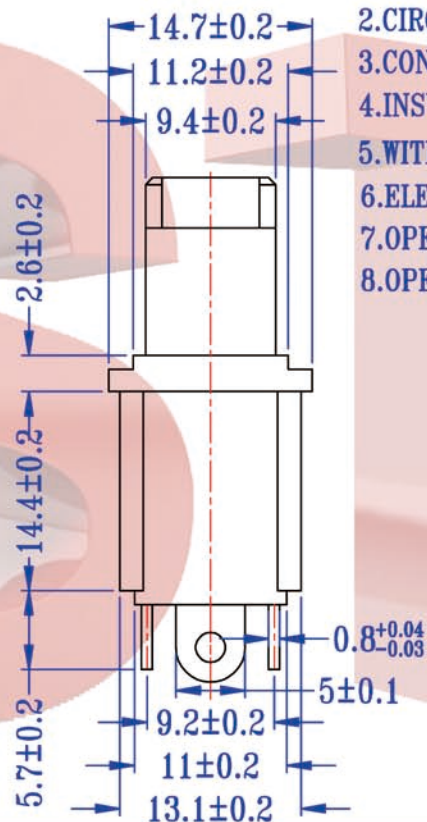


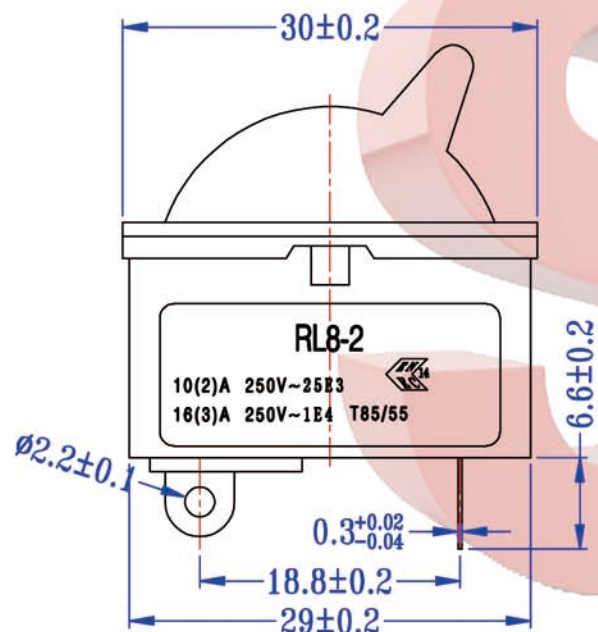

CAD FILE:

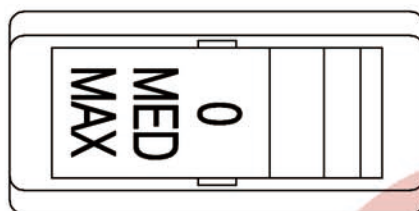

SPECIFICATION

- 1.RATING: 10(2)A 250VAC 25E3
16(3)A 250VAC 1E4 T85/55
ENEC SEMKO:
- 2.CIRCUIT : ON-OFF DPST 3P
- 3.CONTACT RESISTANCE : 30m OHMS Max
- 4.INSULATION RESISTANCE : DC500V 100M OHMS Min
- 5.WITHSTAND VOLTAGE : AC 1500V 1 Minute
- 6.ELECTRICAL LIFE : 10000 Cycles at Full Load
- 7.OPERATION PORCE : 400~800gf
- 8.OPERATION TEMPERATURE RANGE : -25~+125° C

MATERIALS

- 1.HOUSING : NYLON #66 UL 94V-2
- 2.ROCKER : NYLON #66 UL 94V-2
- 3.TERMINAL : COPPER ALLOY Ag PLATED
- 4.CONTACTOR : AgSnO₂In₂O₃(10)/Cu

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE :	UNIT : mm	DRWG NO.: RS-1138		
3					MODEL: RS-1138	SCALE: 2:1	DWN.	Y M G	24-Mar-2020
2							CHK'D	L M	24-Mar-2020
1							APPD.	ENG-8051	24-Mar-2020
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				