







CAD FILE:



Panel thickness	X
0.75~1.25	28.0
1.25~2.00	28.2
2.00~3.00	28.5

PANEL HOLE SIZE

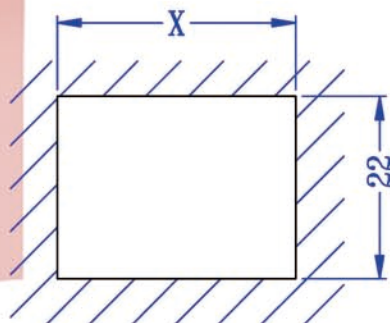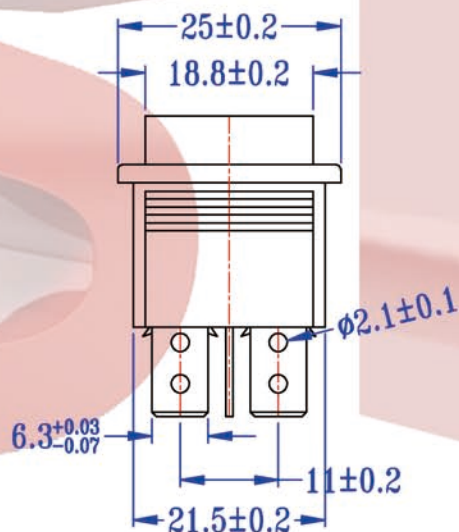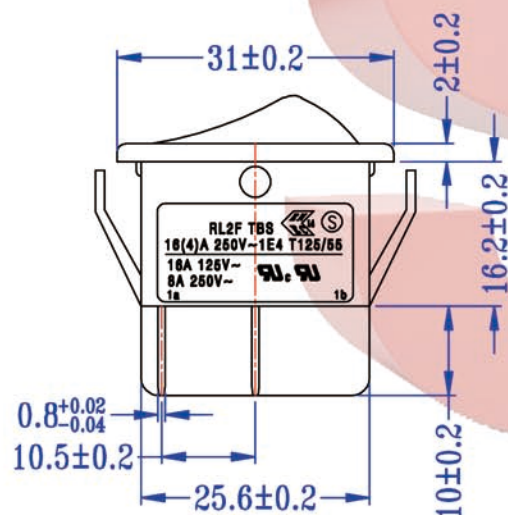

SPECIFICATION

- 1.RATING: 16A 125VAC 8A 250VAC UL C-UL
16(4)A 250VAC T125/55 1E4
ENEC SEMKO ;
- 2.CIRCUIT : ON-OFF W/Lamp DPST 4P
- 3.CONTACT RESISTANCE : 30m OHMS Max
- 4.INSULATION RESISTANCE : DC500V 100M OHMS Min
- 5.WITHSTAND VOLTAGE : AC 1500V 1 Minute
- 6.ELECTRICAL LIFE : 10000 Cycles at Full Load
- 7.OPERATION PORCE : 500~800gf
- 8.OPERATION TEMPERATURE RANGE : -25~+85° C

8					TOLERANCE						
7					UNLESS SPECIFIED						
6					WITHIN 1.5mm : ±0.1mm						
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
4	CONTACTOR	AgSnO ₂ In ₂ O ₃ (10)/Cu	1		TITLE : ROCKER SWITCH			UNIT : mm	DRWG NO.: RS-1139		
3	TERMINAL	COPPER ALLOY Sn or Ag PLATED	1	Ag PLATED	MODEL: RS-1139			SCALE: 1:1	DWN.	Y M G	28-Aug-2020
2	ROCKER	NYLON #66 UL 94V-2	1	BLACK	S.T. INDUSTRIAL (ASIA) LIMITED				CHK'D	L M	28-Aug-2020
1	HOUSING	NYLON #66 UL 94V-2	1	BLACK					APPD.	ENG-8051	28-Aug-2020
NO.	PARTS	MATERIALS	Q'TY	FINISH							