







CAD FILE:

MATERIALS

- 1.HOUSING : NYLON #66 UL 94V-2
- 2.ROCKER : NYLON #66 UL 94V-2
- 3.TERMINAL : COPPER ALLOY Ag PLATED
- 4.CONTACTOR : AgSnO₂In₂O₃(10)/Cu

SPECIFICATION

- 1.RATING: UL C-UL: 10A 125VAC
ENEC SEMKO:
6(2)A 250VAC T125/55 1E4
- 2.CIRCUIT : ON-OFF SPST 2P
- 3.CONTACT RESISTANCE : 30m OHMS Max
- 4.INSULATION RESISTANCE : DC500V 100M OHMS Min
- 5.WITHSTAND VOLTAGE : AC 1500V 1 Minute
- 6.ELECTRICAL LIFE : 10000 Cycles at Full Load
- 7.OPERATION PORCE : 300~650gf
- 8.OPERATION TEMPERATURE RANGE : -25~+125° C

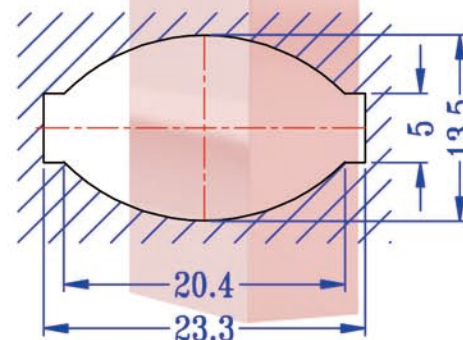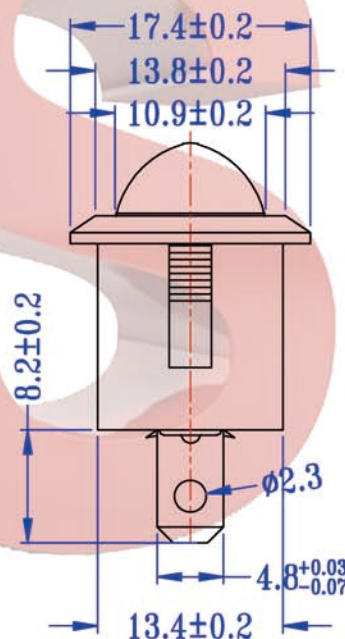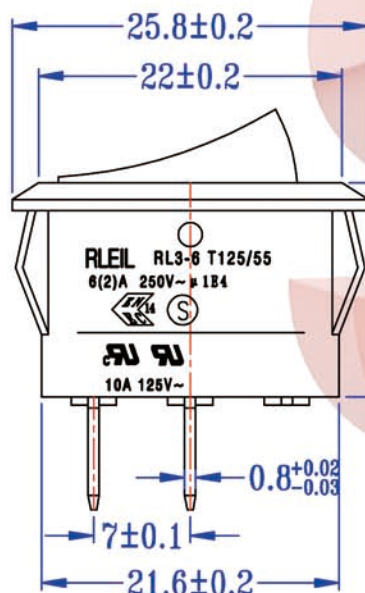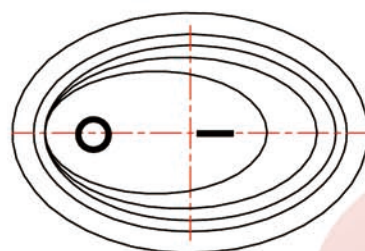

PANEL HOLE SIZE

Panel thickness	X
0.75~1.25	23.3
1.25~2.00	23.6
2.00~3.00	23.9

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : ROCKER SWITCH	UNIT : mm	DRWG NO.: RS-1227		
3					MODEL: RS-1227	SCALE: 2:1	DWN. Y M G	24-Mar-2020	
2							CHK'D L M	24-Mar-2020	
1							APPD. ENG-8051	24-Mar-2020	
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				