



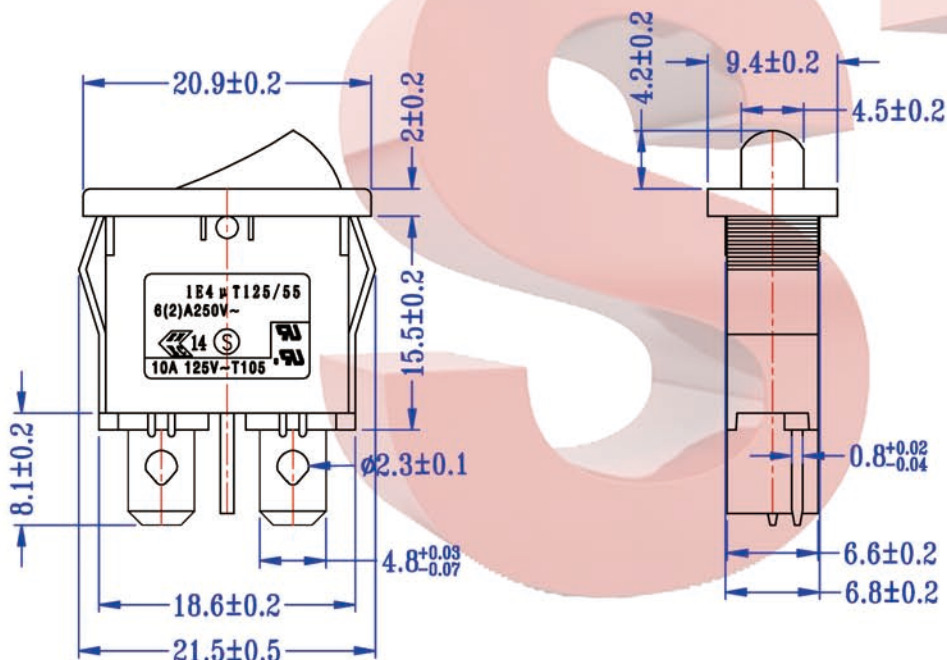

CAD FILE:




MATERIALS

1. HOUSING : NYLON #66 UL 94V-2
2. ROCKER : NYLON #66 UL 94V-2
3. TERMINAL : Copper Alloy Sn or Ag plated
4. CONTACTOR : Ag SnO₂ In₂O₃ (10)/Cu

SPECIFICATION

1. RATING: UL : 10A 125VAC T105 UL C-UL 6(2)A 250VAC T125/55 1E4 ENEC SEMKO ;
2. CIRCUIT : ON-OFF SPST 2P
3. CONTACT RESISTANCE : 30m OHMS Max
4. INSULATION RESISTANCE : DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE : AC 1500V 1 Minute
6. ELECTRICAL LIFE : 10000 Cycles at Full Load
7. OPERATION FORCE : 300~500gf
8. OPERATION TEMPERATURE RANGE : -25~+125° C



PANEL HOLE SIZE

Panel thickness	X
0.75~1.25	19.2
1.25~2.0	19.4
2.0~3.0	19.6

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm				
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE :	UNIT : mm	DRWG NO.: RS-1228		
3					MODEL: RS-1228	SCALE: 2:1	DWN.	Y M G	24-Mar-2020
2							CHK'D	L M	24-Mar-2020
1							APPD.	ENG-049	24-Mar-2020
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				