




CAD FILE:

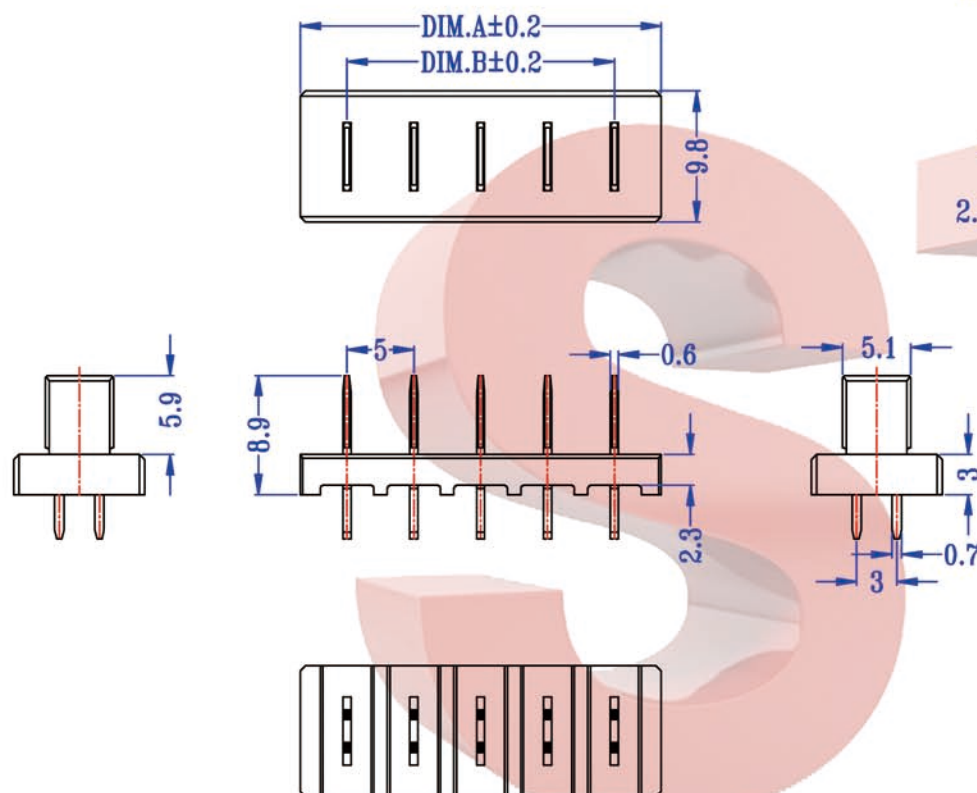

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 16V 7A

1-2.CONTACT RESISTANCE: 30mΩ MAX(INITAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:


500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 1000MΩ MIN,

MEASURED BY 500V DC

2.LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES

PART NO.	Dimension	
	DIM.A	DIM.B
BL-066A-2-2	12.0	5.0
BL-066A-2-3	17.0	10.0
BL-066A-2-4	22.0	15.0
BL-066A-2-5	27.0	20.0

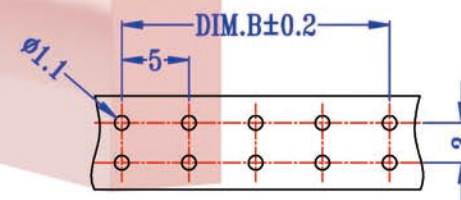

P.C.B LAYOUT

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm						
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
4					TITLE : BLADE TYPE CONNECTOR			UNIT : mm	DRWG NO.: BL-066A-2-5(SERIES)		
3											
2	TERMINAL	C2680	5	Au PLATED	MODEL: BL-066A-2-5(SERIES)			SCALE: 1:1	DWN.	Y M G	12-Dec-2024
1	HOUSING	PA10T	1	BLACK					CHK'D	L M	12-Dec-2024
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED			APPD.	ENG-052		12-Dec-2024