




CAD FILE:

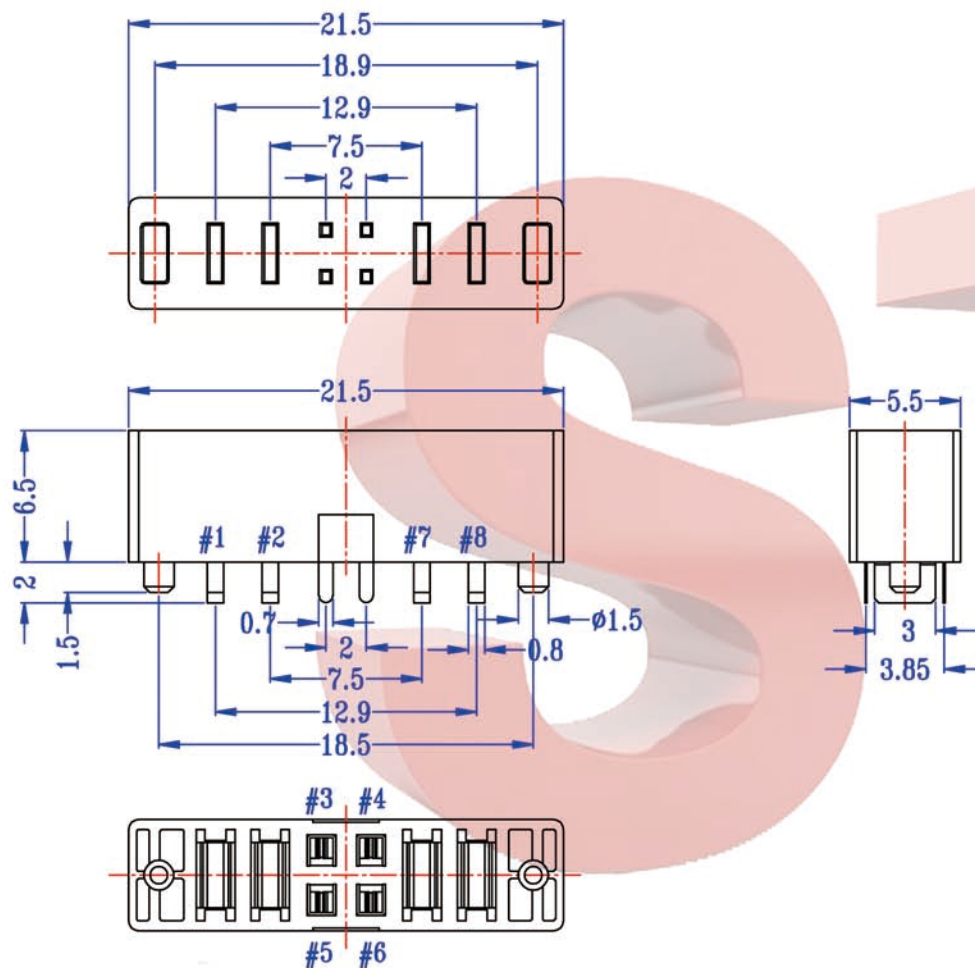

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 15A (DC PIN: #1 #2 #7 #8)
DC 12V 1A (SIGNAL PIN: #3 #4 #5 #6)


1-2.CONTACT RESISTANCE: 20mΩ MAX(INITIAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2.LIFE TEST:

2-1.ELECTRONICS LIFE TEST 5,000 CYCLES

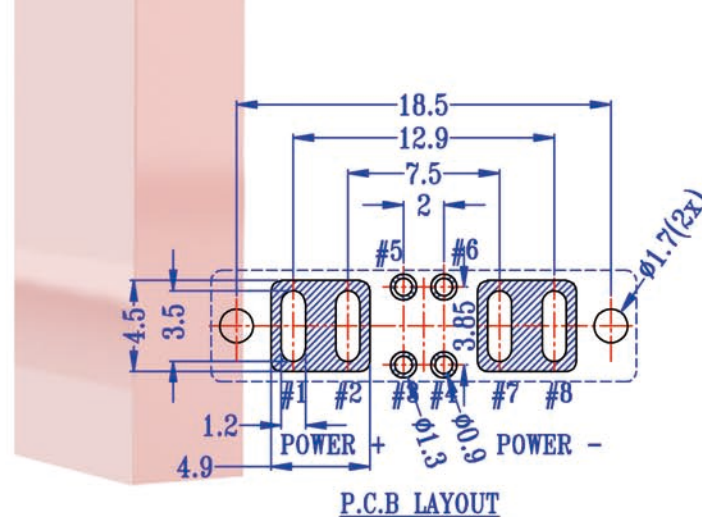

P.C.B LAYOUT

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : BLADE TYPE CONNECTOR	UNIT : mm	DRWG NO.: BL-086B-2-8		
3	TERMINAL #1 #2 #7 #8	C7025	8	Au PLATED	MODEL: BL-086B-2-8	SCALE: 1:1	DWN.	Y M G	28-Aug-2024
2	TERMINAL #3 #4 #5 #6	C5210	4	Au PLATED			CHK'D	L M	28-Aug-2024
1	HOUSING	PA10T	1	BLACK			APPD.	ENG-052	28-Aug-2024
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				