










CAD FILE:

#1 #2 #3 #4 #5 #6 #7 #8



SCHEMATIC

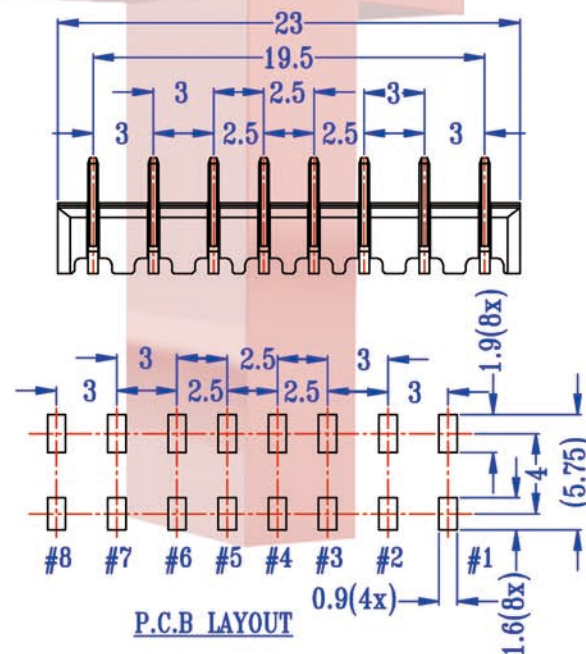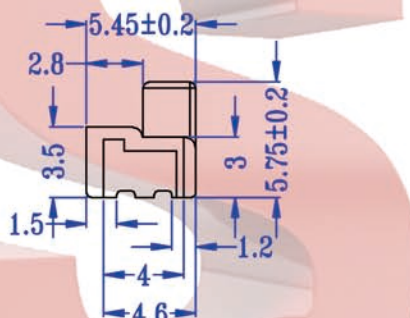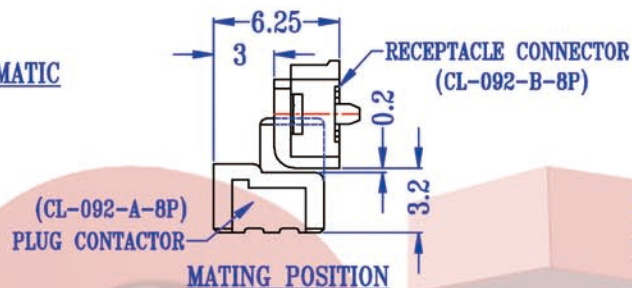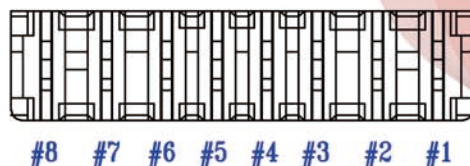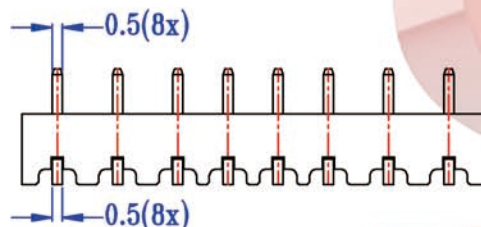

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A

1-2.CONTACT RESISTANCE: 30mΩ MAX(INITIAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2.FORCE:0.5-1.0mm CONTACT TRAVEL: 100±30gf/P

3.LIFE TEST: MECHANICAL LIFE TEST 10,000 CYCLES

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4									
3									
2	TERMINAL	COPPER ALLOY	8	Au PLATED	TITLE : BLADE TYPE CONNECTOR			UNIT : mm	DRWG NO.: BL-092A-25-3-8
1	HOUSING	LCP	1	BLACK	MODEL: BL-092A-25-3-8			SCALE: 1:1	DWN. Y M G 28-Aug-2024
					S.T. INDUSTRIAL (ASIA) LIMITED				CHK'D L M 28-Aug-2024
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD. ENG-052 28-Aug-2024