
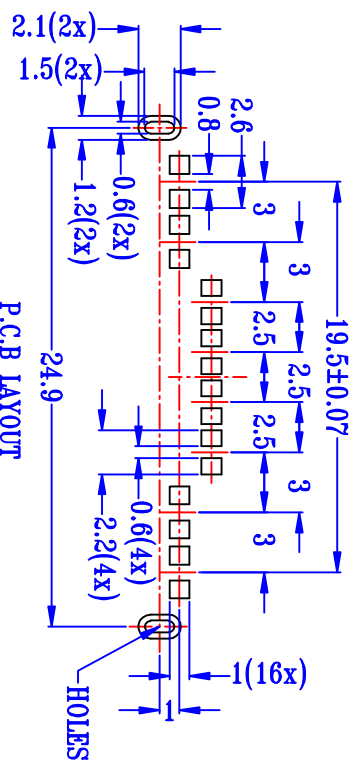
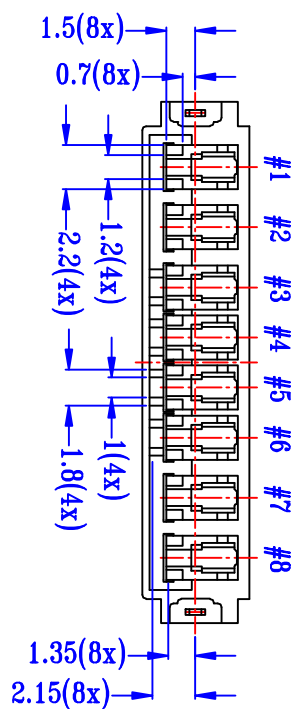
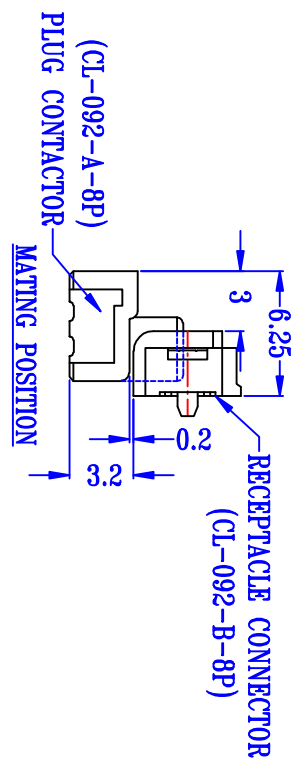

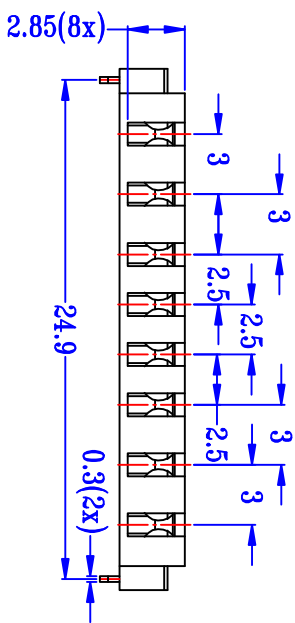



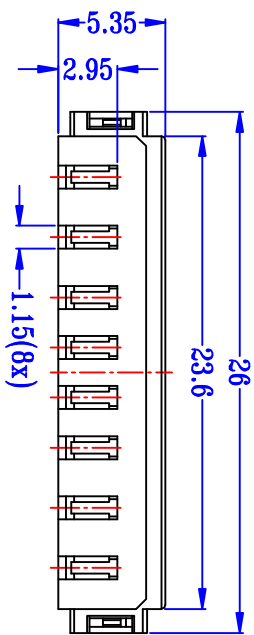

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 2A

1-2.CONTACT RESISTANCE: 30mΩ MAX(INITAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN,

MEASURED BY 500V DC

2.FORCE:0.5-1.0mm CONTACT TRAVEL: 100±30gf/P

3.LIFE TEST: MECHANICAL LIFE TEST 10,000 CYCLES

8									
7									
6									
5									
4									
3	CONTACT TERMINAL	COPPER ALLOY	8	Au PLATED					
2	SUPPORT PLATE	COPPER ALLOY	2	Au PLATED					
1	HOUSING	LCP	1	BLACK					
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				
					TOLERANCE				
					UNLESS SPECIFIED				
					WITHIN 1.5mm : ±0.1mm				
					OVER 1.5mm : ±0.2mm				
					TITLE : BLADE TYPE CONNECTOR				
					UNIT : mm				
					SCALE: 1:1				
					MODEL: BL-092B-25-3-8				
					DESCRIPTIONS OF REVISION				
					DWG NO.: BL-092B-25-3-8				
					DWN. Y M G				
					CHK'D L M				
					APPD. ENG-052				
					28-Aug-2024				