



CAD FILE:

NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS

2. GENERAL TOLERANCE : $\pm 0.2\text{mm}$ 3. MATERIAL : Δ BASE: UL94V-0 PBT THERMOPLASTIC (BLACK) Δ COVER: UL94V-0 PBT THERMOPLASTIC (RED BLACK BLUE) Δ ACTUATORS: UL94V-0 PBT THERMOPLASTIC (WHITE) Δ CONTACT PLATING: GOLD PLATING OVER NICKEL Δ PITTING MATERIAL: EPOXY Δ ELECTRICAL

ELECTRICAL: 2000 OPERATIONS PER SWITCH-24 VDC, 25MA.

NON-SWITCHING RATING : 100MA, 50VDC

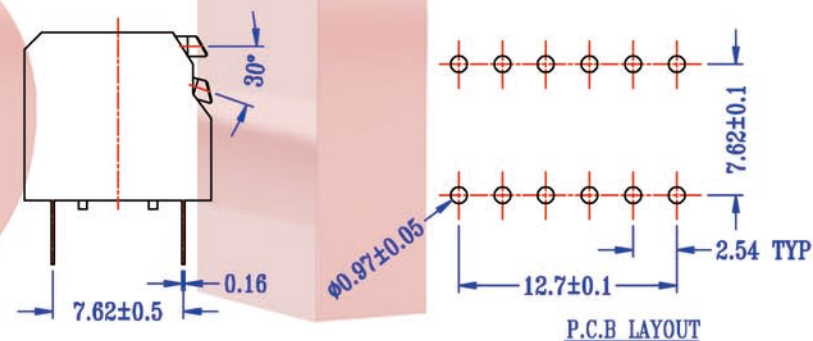
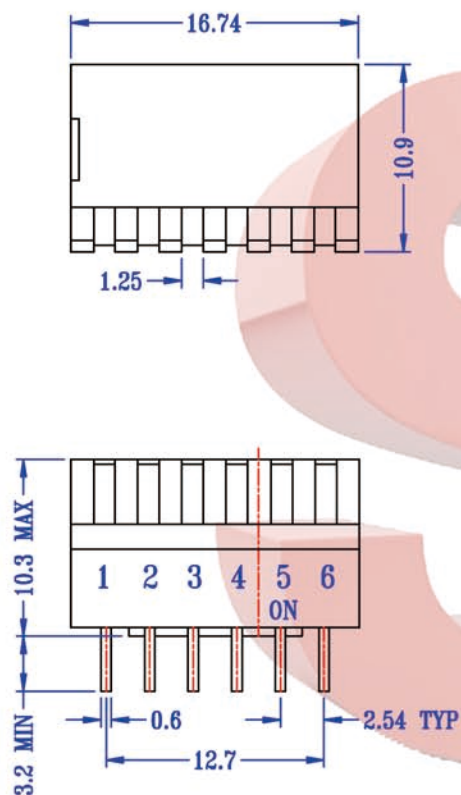
SWITCHING RATING : 25MA, 24VDC

CONTACT RESISTANCE : 50M MAX AT INITIAL

 Δ MECHANICAL

MECHANICAL LIFE: 2000 OPERATIONS PER SWITCH

STROKE: 2.0mm

OPERATION TEMP: -20°C TO 70°C STORAGE TEMP: -40°C TO 85°C 

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : $\pm 0.1\text{mm}$				
5					OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : DIP SWITCH	UNIT : mm	DRWG NO.: DIP-F6-12T		
3					MODEL: DIP-F6-12T	SCALE: 1:1	DWN.	Y M G	28-Aug-2014
2							CHK'D	L M	28-Aug-2014
1							APPD.	ENG-8111	28-Aug-2014
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				