





CAD FILE:

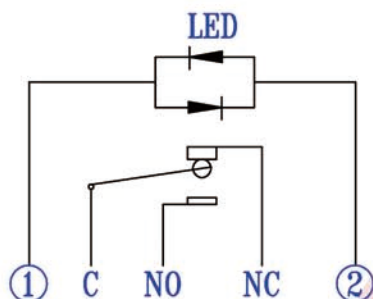

SPECIFICATIONS

- 1.RATING: 5A 250V AC
- 2.LED RATED LOAD: DC3-6V,12-24V,AC110V,AC220V
- 3.OPERATING TEMPERATURE. -30°C-+80°C
- 4.ACTION FORM: LOCK/NON LOCK
- 5.TRAVEL: 2.5mm
- 6.OPERATING FORCE:4N
- 7.MATERIALS
OPENING DIAMETER: 16.2mm
PANEL THICKNESS: <12mm
- 8.WATERPROOF LEVEL: IP65
- 9.PROTECTION LEVEL: IK10
- 10.LED LIGHT LIFE CYCLES 40000 HOURS
- 11.CONTACT RESISTANCE:<50mΩ
- 12.INSULATION RESISTANCE:≥1000mΩ
- 13.DIELECTRIC STRENGTH: 1000VAC MIN
- 14.LIFE CYCLES
ELECTRICAL LIFE: 50000
MECHANICAL LIFE: 500000
- 15.PRODUCT CERTIFICATION: CE ROHS CQC

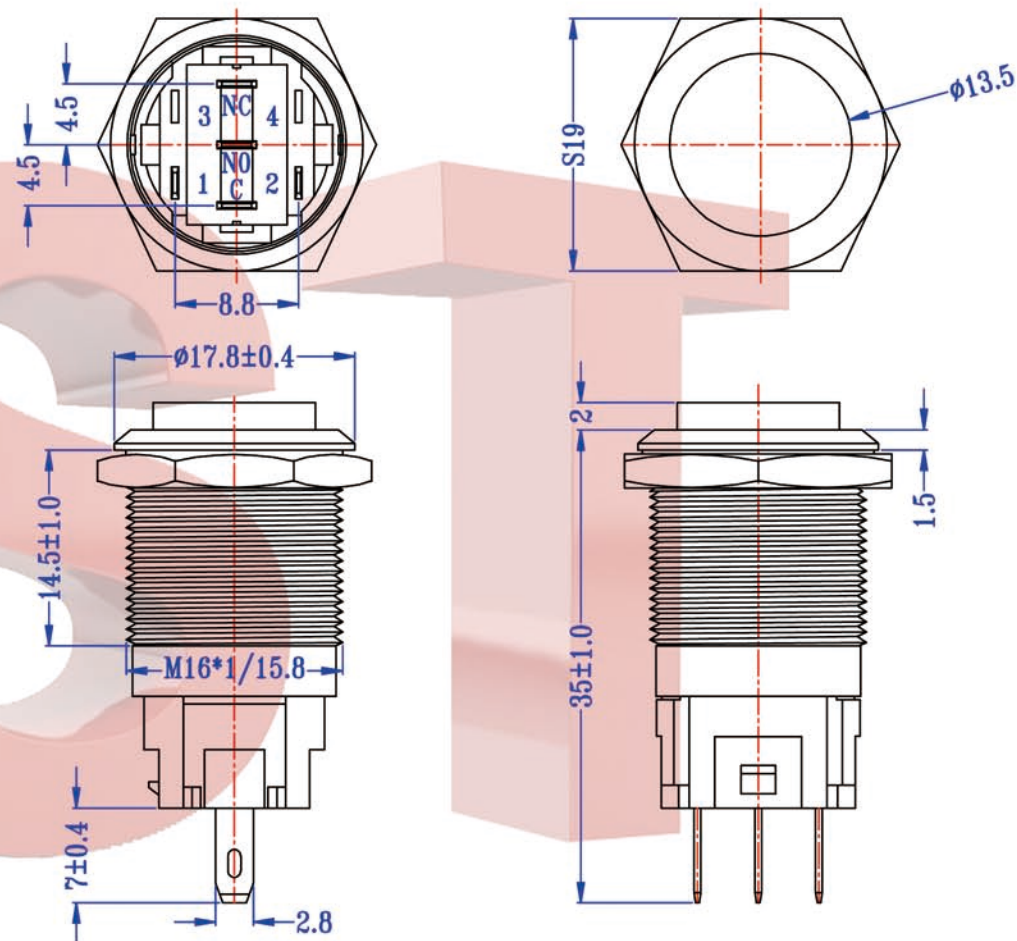

8					TOLERANCE UNLESS SPECIFIED					
7										
6	PINS	H65	3	GOLD/SILVER PLATED	WITHIN 1.5mm : ±0.1mm					
5	CONTACTS	SILVER CONACTS	1		OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.	
4	BASE	HIGH FLAME RETARDANT AND ENVIRONMENTALLY FRIENDLY PA66	1		TITLE :		UNIT : mm	DRWG NO.: PBM-16B02		
3										
2	CASE	304 STINLESS STEEL/CHROME PLATED BRASS	1	ALUMINUM ALLOY OXIDATION	MODEL: PBM-16B02		SCALE: 1:1	DWN.	Y M G	28-Aug-2025
1	BUTTONS	PC/316 STAINLESS STEEL	1	NICKEL PLATED BRASS				CHK'D	L M	28-Aug-2025
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED			APPD.	ENG-016	28-Aug-2025