


1.RATING: 5A 250V AC
2.LED RATED LOAD: DC3-6V,12-24V,AC110V,AC220V
3.OPERATING TEMPERATURE. -30°C-+80°C
4.ACTION FORM: LOCK/NON LOCK
5.TRAVEL: 3.1mm
6.OPERATING FORCE:4N
7.MATERIALS
 OPENING DIAMETER: 19.2mm
 PANEL THICKNESS: <12mm
8.WATERPROOF LEVEL: IP65
9.PROTECTION LEVEL: IK10
10.LED LIGHT LIFE CYCLES 40000 HOURS
11.CONTACT RESISTANCE:≤50mΩ
12.INSULATION RESISTANCE:≥1000mΩ
13.DIELECTRIC STRENGTH: 1000VAC MIN
14.LIFE CYCLES
 ELECTRICAL LIFE: 50000
 MECHANICAL LIFE: 500000
15.PRODUCT CERTIFICATION: CE ROHS CQC

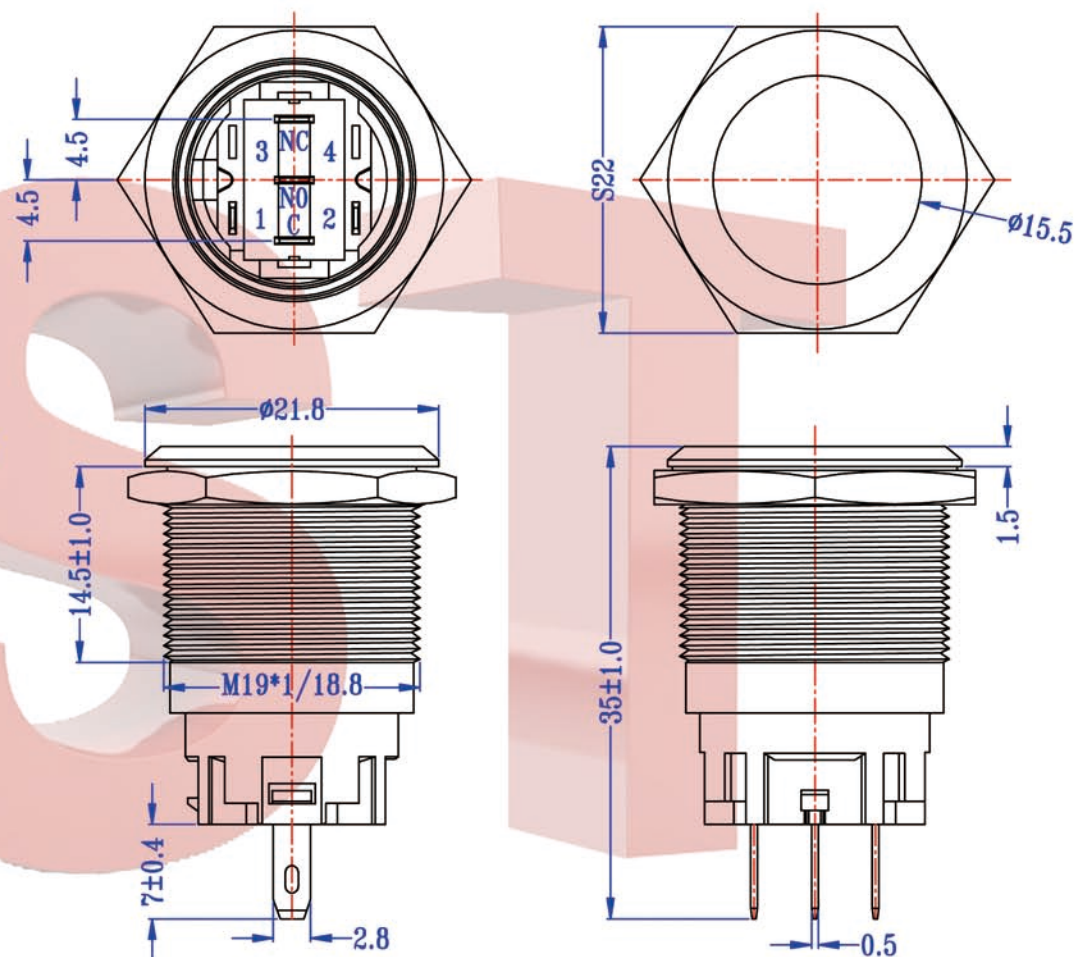

8					TOLERANCE UNLESS SPECIFIED						
7											
6	PINS	H65	3	GOLD/SILVER PLATED	WITHIN 1.5mm : ±0.1mm						
5	CONTACTS	SILVER CONACTS	1		OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	BASE	HIGH FLAME RETARDANT AND ENVIRONMENTALLY FRIENDLY PA66	1		TITLE :			UNIT : mm	DRWG NO.: PBM-19A01		
3											
2	CASE	304 STINLESS STEEL/CHROME PLATED BRASS	1	ALUMINUM ALLOY OXIDATION	MODEL: PBM-19A01			SCALE: 1:1	DWN.	Y M G	28-Aug-2025
1	BUTTONS	PC/316 STAINLESS STEEL	1	NICKEL PLATED BRASS					CHK'D	L M	28-Aug-2025
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				APPD.	ENG-016	28-Aug-2025