


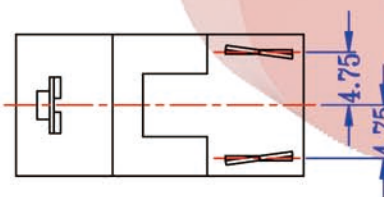


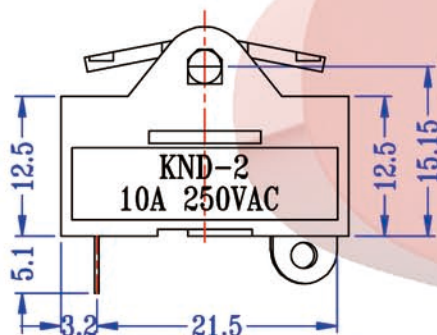

CAD FILE:

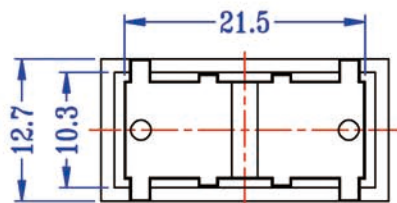

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: AC 125V 10A/250V 5A

1-2.CONTACT RESISTANCE: 100mΩ MAX(INITIAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2.LIFE TEST: 10,000 CYCLES MIN

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm				
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : ROCKER SWITCH	UNIT : mm	DRWG NO.: RS-1229		
3					MODEL: RS-1229	SCALE: 1:1	DWN. Y M G	28-Aug-2024	
2							CHK'D L M	28-Aug-2024	
1							APPD. ENG-052	28-Aug-2024	
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				