




CAD FILE:

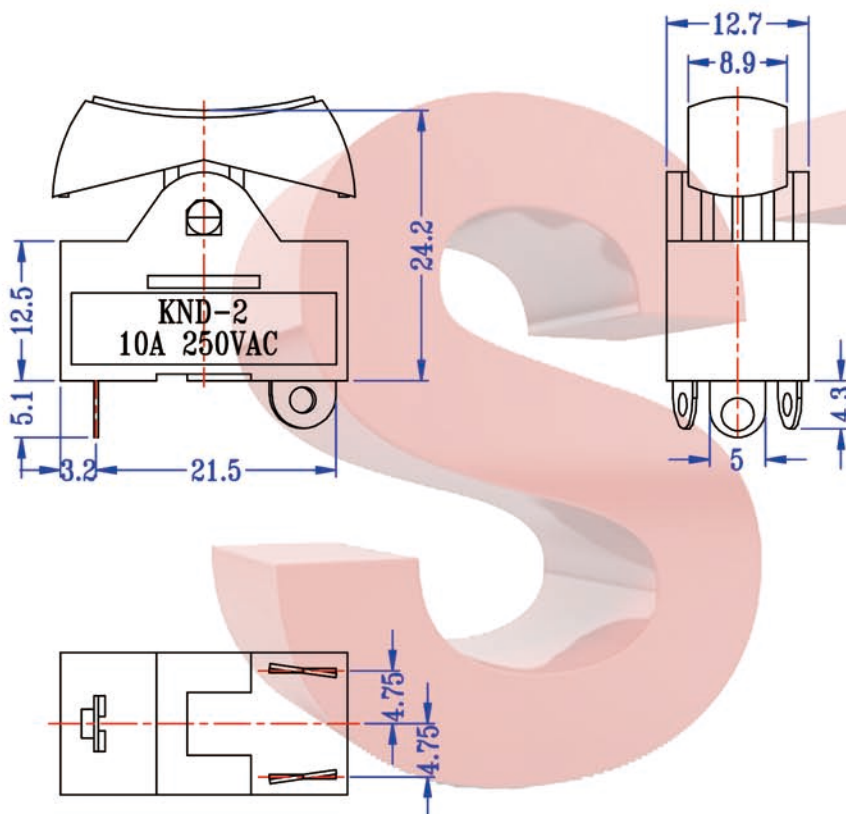

## SPECIFICATIONS

## 1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: AC 125V 10A/250V 5A

1-2.CONTACT RESISTANCE: 100mΩ MAX(INITIAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE1-4.INSULATION RESISTANCE: 100MΩ MIN,  
MEASURED BY 500V DC

2.LIFE TEST: 10,000 CYCLES MIN

|     |       |           |      |        |                                |            |                   |                          |       |
|-----|-------|-----------|------|--------|--------------------------------|------------|-------------------|--------------------------|-------|
| 8   |       |           |      |        | TOLERANCE                      |            |                   |                          |       |
| 7   |       |           |      |        | UNLESS SPECIFIED               |            |                   |                          |       |
| 6   |       |           |      |        | WITHIN 1.5mm : ±0.1mm          |            |                   |                          |       |
| 5   |       |           |      |        | OVER 1.5mm : ±0.2mm            | ISSUE      | DATE              | DESCRIPTIONS OF REVISION | APPD. |
| 4   |       |           |      |        | TITLE : ROCKER SWITCH          | UNIT : mm  | DRWG NO.: RS-1230 |                          |       |
| 3   |       |           |      |        | MODEL: RS-1230                 | SCALE: 1:1 | DWN. Y M G        | 28-Aug-2024              |       |
| 2   |       |           |      |        |                                |            | CHK'D L M         | 28-Aug-2024              |       |
| 1   |       |           |      |        |                                |            | APPD. ENG-052     | 28-Aug-2024              |       |
| NO. | PARTS | MATERIALS | Q'TY | FINISH | S.T. INDUSTRIAL (ASIA) LIMITED |            |                   |                          |       |