




CAD FILE:

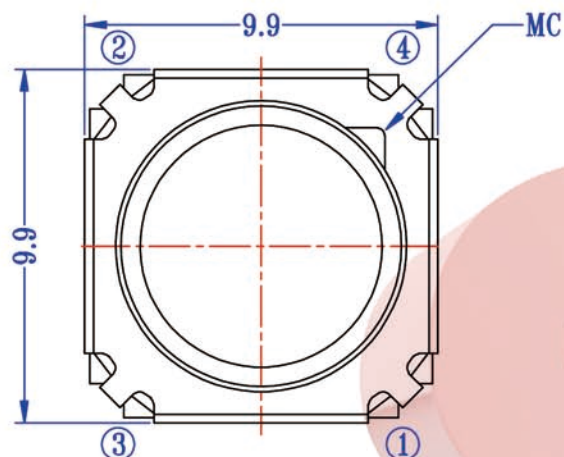

SPECIFICATIONS

1.ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 28V 50mA

1-2.CONTACT RESISTANCE: 50mΩ MAX(INITIAL)





1-3.DIELECTRIC WITHSTANDING VOLTAGE:
250V AC FOR ONE MINUTE1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2.TRAVEL: 0.75±0.2mm

3.MECHANICAL CHARACTERISTICS:

3-1.OPERATING FORCE: 680±100gf

4.LIFE TEST 100000 CYCLES MIN.

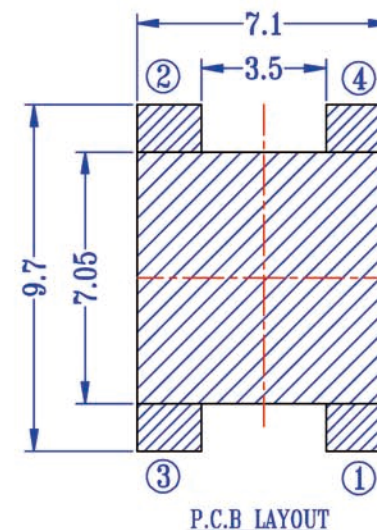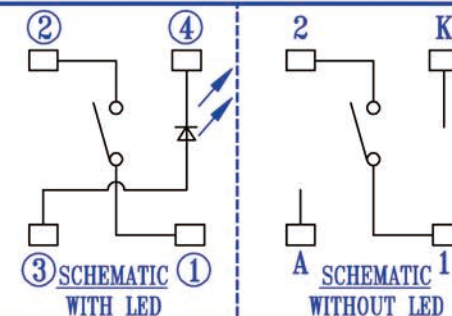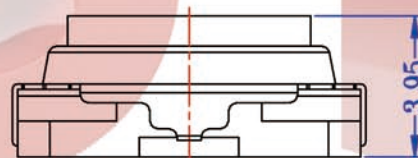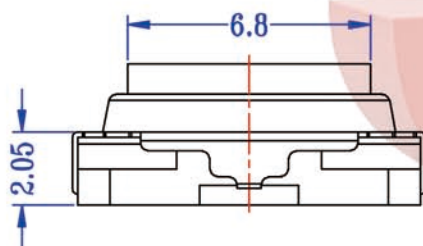

8					TOLERANCE UNLESS SPECIFIED						
7											
6	COVER	SUS 304	1	NATURAL	WITHIN 1.5mm : ±0.1mm						
5	TERMINAL	PCB	1	Au PLATED	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION			APPD.
4	CASE	PCB	1	BLACK	TITLE : TACT SWITCH			UNIT : mm	DRWG NO.: TLED-037-M		
3	DOME	SUS 301	1	Au CLAD							
2	LED	GAP	1	RED/WHITE	MODEL: TLED-037-M			SCALE: 1:1	DWN.	Y M G	28-Aug-2024
1	KNOB	SI	1	WHITE					CHK'D	L M	28-Aug-2024
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED			APPD.	ENG-052	28-Aug-2024	