


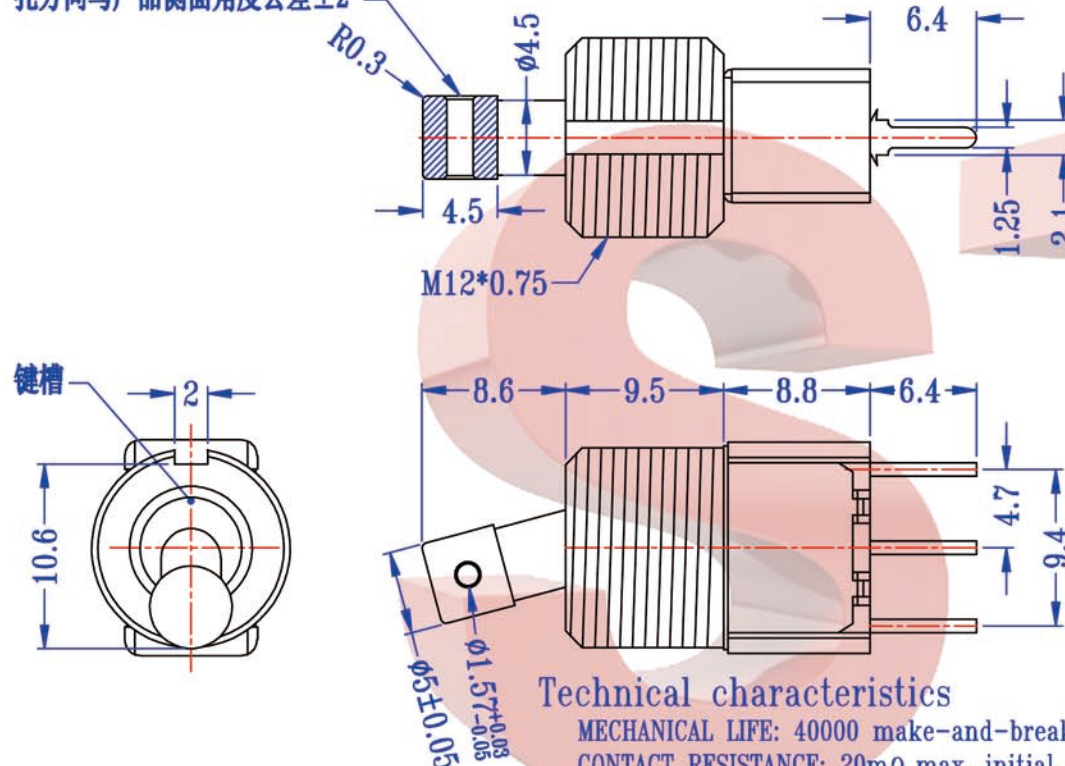

CAD FILE:

孔方向与产品侧面角度公差 $\pm 2^\circ$ 

Technical characteristics

MECHANICAL LIFE: 40000 make-and-break cycles
CONTACT RESISTANCE: 20m Ω max. initial @2-4VDC
100mA for both silver.
INSULATION RESISTANCE: 1000 M Ω min
DIELECTRIC STRENGTH: 1500 VAC min
OPERATING TEMPERATURE: -30°C to +85°C

MATERIALS

CASE: PPA (UL94V-0)
HOUSING: Stainless steel
ACTUATOR: Alloy, chrome plated
BUSHING: Alloy, chrome plated
CONTACTS/TERMINAL: Copper alloy silver plated.

手柄位置及导通端子示意图

	POS.1	POS.2	POS.3
MODEL NO.			
112	ON	NONE	ON
SCHEMATIC		OPEN	

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ± 0.1 mm				
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4					TITLE : TOGGLE SWITCH	UNIT : mm	DRWG NO.: TS-M103-J2Y		
3					MODEL: TS-M103-J2Y	SCALE: 5:2	DWN. Y M G	7-Oct-2023	
2							CHK'D L M	7-Oct-2023	
1							APPD. ENG-031	7-Oct-2023	
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED				