






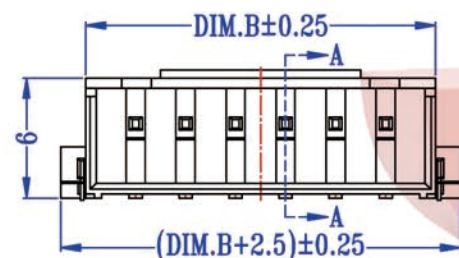

CAD FILE:

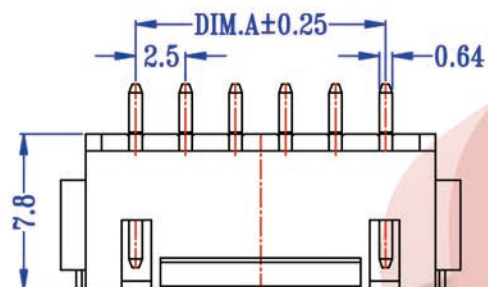

SECTION A-A

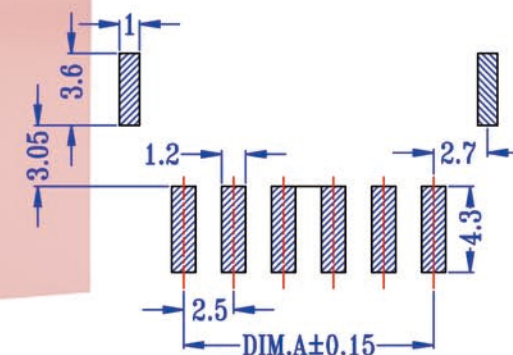

P.C.B LAYOUT

## SPECIFICATIONS

## 1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: AC 250V 3A
- 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITIAL)
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
- 1-4.INSULATION RESISTANCE: 100MΩ MIN,  
MEASURED BY 500V DC

| PART NO.            | DIM.A | DIM.B |
|---------------------|-------|-------|
| JSC-005-SH25-WT-2P  | 2.5   | 7.5   |
| JSC-005-SH25-WT-3P  | 5.0   | 10.0  |
| JSC-005-SH25-WT-4P  | 7.5   | 12.5  |
| JSC-005-SH25-WT-5P  | 10.0  | 15.0  |
| JSC-005-SH25-WT-6P  | 12.5  | 17.5  |
| JSC-005-SH25-WT-7P  | 15.0  | 20.0  |
| JSC-005-SH25-WT-8P  | 17.5  | 22.5  |
| JSC-005-SH25-WT-9P  | 20.0  | 25.0  |
| JSC-005-SH25-WT-10P | 22.5  | 27.5  |
| JSC-005-SH25-WT-11P | 25.0  | 30.0  |
| JSC-005-SH25-WT-12P | 27.5  | 32.5  |
| JSC-005-SH25-WT-13P | 30.0  | 35.0  |
| JSC-005-SH25-WT-14P | 32.5  | 37.5  |
| JSC-005-SH25-WT-15P | 35.0  | 40.0  |
| JSC-005-SH25-WT-16P | 37.5  | 42.5  |
| JSC-005-SH25-WT-17P | 40.0  | 45.0  |
| JSC-005-SH25-WT-18P | 42.5  | 47.5  |
| JSC-005-SH25-WT-19P | 45.0  | 50.0  |
| JSC-005-SH25-WT-20P | 47.5  | 52.5  |

|     |          |           |      |           |                                |       |      |                           |                              |
|-----|----------|-----------|------|-----------|--------------------------------|-------|------|---------------------------|------------------------------|
| 8   |          |           |      |           | TOLERANCE<br>UNLESS SPECIFIED  |       |      |                           |                              |
| 7   |          |           |      |           |                                |       |      |                           |                              |
| 6   |          |           |      |           | WITHIN 1.5mm : ±0.1mm          |       |      |                           |                              |
| 5   |          |           |      |           | OVER 1.5mm : ±0.2mm            | ISSUE | DATE | DESCRIPTIONS OF REVISION  | APPD.                        |
| 4   |          |           |      |           | TITLE : JSC XH SERIES          |       |      | UNIT : mm                 | DRWG NO.: JSC-005-SH25-WT-6P |
| 3   | PEG      | C2680     | 2    | Sn PLATED | MODEL: JSC-005-SH25-WT-6P      |       |      | SCALE: 1:1                | DWN. Y M G 12-Dec-2025       |
| 2   | TERMINAL | C2680     | 1    | Sn PLATED | S.T. INDUSTRIAL (ASIA) LIMITED |       |      | CHK'D L M                 | 12-Dec-2025                  |
| 1   | HOUSING  | LCP       | 1    | WHITE     |                                |       |      | APPD. ENG-052 12-Dec-2025 |                              |
| NO. | PARTS    | MATERIALS | Q'TY | FINISH    |                                |       |      |                           |                              |