







CAD FILE:

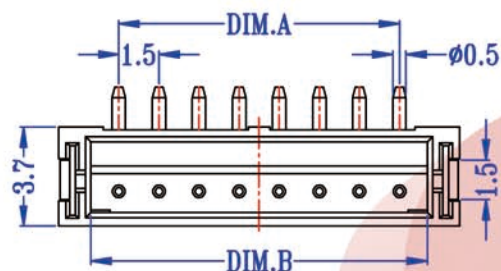

SPECIFICATIONS


1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: AC 125V 1A
 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITIAL)
 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC FOR ONE MINUTE
 1-4.INSULATION RESISTANCE: 100MΩ MIN,
 MEASURED BY 500V DC

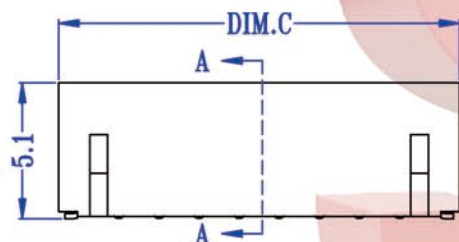

SECTION A-A

PART NO.	DIM.A	DIM.B	DIM.C
JSC-006-ZH1.5-LT-2P	1.5	3.6	6.0
JSC-006-ZH1.5-LT-3P	3.0	5.1	7.5
JSC-006-ZH1.5-LT-4P	4.5	6.6	9.0
JSC-006-ZH1.5-LT-5P	6.0	8.1	10.5
JSC-006-ZH1.5-LT-6P	7.5	9.6	12.0
JSC-006-ZH1.5-LT-7P	9.0	11.1	13.5
JSC-006-ZH1.5-LT-8P	10.5	12.6	15.0
JSC-006-ZH1.5-LT-9P	12.0	14.1	17.5
JSC-006-ZH1.5-LT-10P	13.5	15.6	18.0
JSC-006-ZH1.5-LT-11P	15.0	17.1	20.5
JSC-006-ZH1.5-LT-12P	16.5	18.6	21.0
JSC-006-ZH1.5-LT-13P	18.0	20.1	23.5
JSC-006-ZH1.5-LT-14P	19.5	21.6	24.0
JSC-006-ZH1.5-LT-15P	21.0	23.1	26.5
JSC-006-ZH1.5-LT-16P	22.5	24.6	27.0
JSC-006-ZH1.5-LT-17P	24.0	26.1	29.5
JSC-006-ZH1.5-LT-18P	25.5	27.6	30.0
JSC-006-ZH1.5-LT-19P	27.0	29.1	32.5
JSC-006-ZH1.5-LT-20P	28.5	30.6	33.0

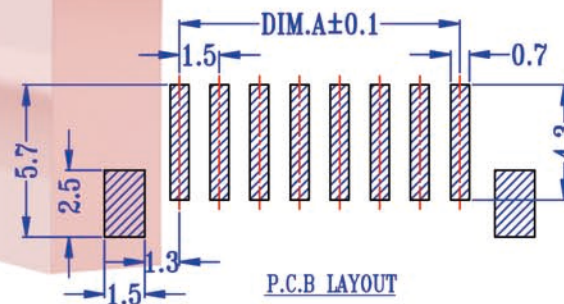

P.C.B LAYOUT

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm						
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
4	PEG	C2680	2	Sn PLATED	TITLE : JSC ZH SERIES			UNIT : mm	DRWG NO.: JSC-006-ZH1.5-LT-8P		
3	TERMINAL	C2680	1	Sn PLATED							
2	HOUSING	LCP	1	WHITE	MODEL: JSC-006-ZH1.5-LT-8P			SCALE: 1:1	DWN.	Y M G	18-Dec-2025
1	CAP	LCP	1	WHITE					CHK'D	L M	18-Dec-2025
NO.	PARTS	MATERIALS	Q'TY	FINISH	S.T. INDUSTRIAL (ASIA) LIMITED			APPD.	ENG-052	18-Dec-2025	